

# ZR30

## OPTICAL POD

4K RESOLUTION 30X OPTICAL ZOOM

## USER MANUAL



**V1.3**

**January 2024**

Thank you for purchasing SIYI's product.

ZR30 is a zoom optical pod with quick release structure and up to 180X hybrid zoom / 30X optical zoom, carrying a 4K 1/2.7-inch Sony CMOS, 4K video recording and photography, abundant gimbal control interface compatible with both SIYI links and third-party links. High accuracy and high collaboration control algorithms ensure stable imaging and zooming ability during flight. HDR and starlight night vision extend the application scenarios to both day and night. In a word, ZR30 optical pod is a rare and good payload for multi-rotors, VTOLs, and robotics.

To ensure you a good experience of the product, please read this manual carefully. If you encounter any issue using the product, please consult the manual or check the online pages of this product on SIYI official store (<https://shop.siyi.biz>). You can also write an email to SIYI official A/S center ([support@siyi.biz](mailto:support@siyi.biz)).

## SIYI User Group - Facebook



**SIYI Official Website** (<https://siyi.biz/en>)

**SIYI Official Store** (<https://shop.siyi.biz>)

**SIYI Official AliExpress Store** (<https://siyi.aliexpress.com>)

**SIYI YouTube Channel** (<https://www.youtube.com/c/SIYITech>)

## User Manual Update Log

Version	Date	Updates
1.3	2024.1	<ol style="list-style-type: none"> <li>1. Product features</li> <li>2. Technical specifications</li> <li>3. Main firmware update log.</li> <li>4. SIYI FPV app update log.</li> <li>5. SIYI FPV SDK Guide.</li> <li>6. SIYI Gimbal SDK</li> <li>7. Add diagrams in some chapters.</li> <li>8. Instruction for AI follow function</li> </ol>
1.2	2023.10	<ol style="list-style-type: none"> <li>1. Main firmware update log.</li> <li>2. SIYI FPV app update log.</li> </ol>
1.1	2023.8	<ol style="list-style-type: none"> <li>1. Special interesting functions and cautions.</li> <li>2. Instruction for acquiring and download files from SIYI camera's web server.</li> <li>3. Necessary update for SIYI FPV app.</li> <li>4. Necessary update for SDK commands.</li> <li>5. Instruction for gimbal Mavlink control.</li> <li>6. Instruction for integrating Mavlink flight attitude data.</li> <li>7. Trouble shooting for abnormal gimbal attitude.</li> <li>8. User manual update log.</li> <li>9. Main firmware update log.</li> <li>10. SIYI FPV app update log.</li> <li>11. Necessary update for technical specification.</li> </ol>

## CONTENT

READ TIPS.....	1
Icons.....	1
Safety .....	1
Storage / Carrying / Recycling .....	2
1 INTRODUCTION .....	3
1.1 Product Features .....	3
1.2 Ports, Interface & Definition .....	7
1.3 Technical Specification.....	8
1.4 Packing List.....	10
1.5 Indicator Definition.....	11
2 GET READY TO USE ZR30.....	12
2.1 Installation .....	12
2.2 Connection and Power.....	13
2.3 Interesting Functions and Cautions.....	14
2.3.1 Capture with Time and Location Information .....	14
2.3.2 Point to Focus & Focus Tracking .....	15
2.3.3 Output Four Video Streams from the Same RTSP Addresses.....	15
3 GIMBAL CONTROL .....	17
3.1 Enable AI Recognition, Tracking, and Follow through SIYI AI Tracking Module Using SIYI Optical Pod (Gimbal Camera) and SIYI Link.....	18
3.2 Control SIYI Optical Pod (Gimbal Camera) in SIYI FPV App or SIYI QGC App through SIYI link..	25
3.2.1 Preparation.....	26
3.2.2 Gimbal Pitch and Yaw Rotation.....	27
3.2.3 Zoom and Focus.....	28
3.2.4 Take pictures and Record Video .....	28
3.3 Control SIYI Optical Pod (Gimbal Camera) in SIYI QGC (Windows) Software through SIYI Link ..	29
3.3.1 Preparation.....	30
3.3.2 Gimbal Pitch and Yaw Rotation.....	32
3.3.3 Zoom and Focus.....	32
3.3.4 Take pictures and Record Video .....	32

3.4 Control SIYI Optical Pod (Gimbal Camera) by S.Bus Signal and Forward S.Bus Signal to Flight Controller through SIYI Link.....	34
3.4.1 Preparation.....	35
3.4.2 Gimbal Pitch and Yaw Rotation (Taking an example of Dial Control).....	37
3.4.3 Zoom and Focus (Taking an Example of Switch Control).....	38
3.4.4 Take Pictures and Record Video (Taking an Example of Button Control).....	39
3.5 UART / UDP Control (SIYI Gimbal SDK).....	40
3.5.1 SDK Protocol Format .....	40
3.5.2 SDK Communication Commands.....	40
3.5.3 SIYI Gimbal Camera SDK Communication Interface .....	59
3.5.4 SIYI Gimbal Camera SDK Communication Code Examples .....	59
3.5.5 SDK CRC16 Code .....	62
3.5.6 Advanced Guide for SIYI Gimbal SDK Integration .....	63
3.5.7 Interface Documentation for SIYI Gimbal Camera’s Web Server .....	68
3.6 Control SIYI Gimbal Camera by the ArduPilot Driver through UART and Integrate Flight Controller Attitude Data.....	75
3.7 Control SIYI Gimbal Camera by Mavlink Gimbal Protocol through UART and Integrate Flight Controller Attitude Data .....	80
3.8 Necessary Trouble Shooting Steps When Gimbal Attitude Control Is Abnormal.....	82
4 VIDEO OUTPUT.....	84
4.1 Output Video to Windows Device Directly through Ethernet .....	85
4.2 Output Video to Third-Party Link through Ethernet.....	89
4.3 Output Video through Micro-HDMI.....	90
4.4 Solutions to No Image through Ethernet.....	91
4.4.1 Video Output to Android Device .....	91
4.4.2 Video Output to Windows Device.....	93
4.5 Common IP Addresses .....	95
5 SIYI FPV APP .....	96
5.1 Settings.....	98
5.2 Link Status.....	99
5.3 Gimbal Camera.....	100
5.4 About SIYI FPV .....	102

5.5 SIYI FPV App Update Log .....	103
7.6 SIYI FPV SDK Guide.....	105
7.6.1 Access Method .....	105
7.6.2 Interface Instructions .....	107
7.7 SIYI FPV SDK Update Log .....	110
6 SIYI Assistant.....	111
6.1 Gimbal / Zoom Firmware Update .....	112
6.2 Camera Firmware Update.....	115
6.3 Gimbal Camera Configuration .....	117
6.3.1 Channel Configuration.....	117
6.3.2 Camera Configuration .....	119
6.4 Gimbal Calibration .....	120
6.4.1 IMU Calibration .....	120
6.4.2 IMU Constant Temperature Calibration .....	122
6.4.3 Accelerator Hexahedral Calibration .....	123
6.5 Main Firmware Update Log.....	124
6.6 SIYI PC Assistant Update Log.....	126
7 After-sale Service .....	127
7.1 Repair Service.....	127
7.2 Warranty .....	128
7.2.1 7-Day Return & Refund.....	128
7.2.2 15-Day Replacement.....	129
7.2.3 1-Year Warranty Repair .....	131

## READ TIPS

### Icons

Please pay more attention to content indicated with the following marks:



**DANGER** Dangerous manipulation probably leads to human injuries.



**WARNING** Warnings on manipulation possibly leads to human injuries.



**CAUTION** Cautions on what manipulation may lead to property loss.



**Prohibited**



**Mandatory**



**Mark**

### Safety

ZR30 optical pod is designed for professional application in specific scenes, which has been done necessary configuration before delivery, it is forbidden to disassemble the gimbal or to change its mechanical structure. And don't add more payload to the gimbal other than its own camera. Gimbal camera is designed with very precise structure, users who approach to the equipment should have the basic knowledge of how to operate it. Irregular or irresponsible manipulations to the device may cause damage, property loss, or human injuries, and SIYI Technology is not obliged to any of the damage, loss, or injury. It is prohibited to use SIYI products for military purpose. Users under 14 years' old should follow an



experienced trainer's guide. Disassembling or modification to the system is prohibited without permission from its manufacturer, SIYI Technology.

## **Storage / Carrying / Recycling**

When your SIYI products are stand idle, or you are bringing it outdoors, or the system reached service life, then please do read the precautions below.



### **CAUTION**

Always place your SIYI products at places where babies or kids do not reach.



### **DANGER**

SIYI products should be placed in places with below conditions:

Not too hot (above 60°C) or too cold (under -20°C).

Not under direct sunshine or too dusty or too wet.

Not on an unstable holder which lacks solid supports or may cause vibration.

Not nearby steam or other heat sources.

# 1 INTRODUCTION

## 1.1 Product Features

### Professional UAV Imaging System

ZR30 carries an 1/2.7-inch Sony image sensor, an 8 megapixels CMOS with remarkable photosensitivity ability, impressive 4K video recording and photography. Up to 180x hybrid zoom (30x optical zoom). The scenery is clear, the algorithm is fast and accurate, and the viewpoint is automatically focused, making it easy to produce grand pictures. Silky movement, smooth zoom, distant scenery, now within reach.

\*The picture files captured by ZR30 can be written with GPS location information and time attributes.

### Point To Focus

Point anywhere to focus lens from zoom camera to get clear view on selected part of screen.

### Focus Tracking

Zoom camera stays focusing and keeps filming smooth videos while users are scaling images.

### Starlight Night Vision

The ultra-sensitive starlight CMOS keep images bright in low light environment.

### HDR

HDR (High Dynamic Range) precisely captures good details of highlights and shadows in dynamic scenes to get true colors and natural brightness.

## **AI Enhanced Smart Identify and Tracking**

ZR30 works with the optional SIYI AI tracking module, which combines SIYI's self-developed AI algorithm and collaborate with SIYI optical pods (gimbal cameras) to achieve real-time tracking and capture of targets, and real-time focusing and zooming to highlight the selected object in the picture. The target will always be in the center of the picture and maintain a clearly visible proportion of the picture.

It supports the anti-lost function. During the following process, if the target is blocked or briefly leaves the monitoring screen, the AI tracking module can automatically recognize and continue tracking when it re-enters the monitoring screen.

## **540-Degree Yaw Axis Rotation**

### **Quick Release, Fast Payload Switch**

The yaw axis of ZR30 rotates in a range of 540 degrees. Hanging below VTOL drones or planes, ZR30 optical pod captures 360 degrees around. SIYI quick release structure will support more interesting payloads in the future. Welcome to follow for updates!

## **Incomparable Gimbal Control Interface**

SIYI optical pods' (gimbal cameras') powerful compatibility contribute to smart robotics ecology in all dimensions. They can be controlled through traditional S.Bus si

gnal by switches and dials, or through Ethernet by touchscreen or by UDP / TCP commands based on SIYI gimbal SDK, or through UART by SIYI gimbal SDK or by mainstream open-source protocols ArduPilot and PX4 (Mavlink).

## **Gimbal Motion Mode**

### **Nose Mode**

When the gimbal is installed at an angle of 90 degrees to the horizontal plane, it will automatically enter the nose mode, which is convenient for installation on the nose position of the fixed-

wing drone to achieve a friendlier installation angle and a wider field of view.

### **Upside Down Mode**

Gimbal automatically activates upside down mode when it is placed upside down, very convenient to be mounted on multiple kinds of vehicles like UGV, USV, robot dog, and more robotics.

### **Follow Mode**

Horizontally, gimbal follows when aircraft rotates.

### **Lock Mode**

Horizontally, gimbal does not follow when aircraft rotates.

### **FPV Mode**

Gimbal rotates simultaneously as aircraft rolls to get FPV view, and output enhanced stable images.

## **High Accuracy and High Collaboration Control Algorithms**

SIYI has done even more in control algorithms and stabilization algorithms.

### **IMU Calibration Algorithms**

Compensate and correct errors of the inertial measurement unit, reduce interference factors such as zero bias, scale factor, inter-axis error, temperature drift, noise, etc., greatly improve the measurement accuracy of IMU, and improve the stability of the gimbal in large temperature differences, wide margin steering, and strong vibration environments.

### **Attitude Fusion Algorithms**

Comprehensively utilize the data of sensors such as accelerometers and gyroscopes, obtain the pitch angle, roll angle, and yaw angle of the gimbal through mathematical models and filtering algorithms, and fuse this information to effectively improve system performance, stability, and robustness.

### **Industry-Level 3-Axis Stabilization Algorithms**

Deeply integrate and utilize 3-axis gyroscopes, 3-axis accelerometers, PID controllers, motors, and magnetic encoders to achieve gimbal attitude stabilization control and continuously output stable high-definition video images during motion.


### **High-Precision FOC Motor Control Algorithms**

Control the current components of the motor to control torque and magnetic field respectively, thereby achieving decoupling control of the brushless motor and greatly reducing picture jitter.


## 1.2 Ports, Interface & Definition




- ① Power Input (3S to 6S)
- ② Control Signal Input & Output (S.Bus / UART)
- ③ Control Signal Input & Output (S.Bus / UART)
- ④ Ethernet (Ethernet video stream and SDK protocol control)
- ⑤ Micro-HDMI (Video output)
- ⑥ Type-C (Upgrade and configure)
- ⑦ TF Card Slot (File storage and copy)
- ⑧ Status Indicator

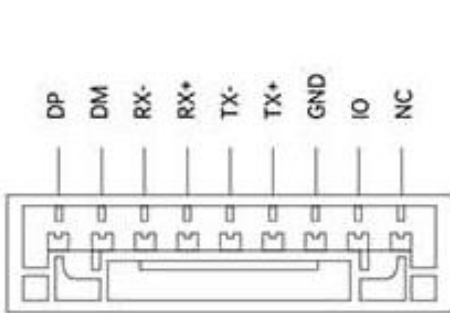

Video & Protocol



Gimbal Control



Power

## 1.3 Technical Specification

### Overall

<b>Video Output Port</b>	Ethernet Micro-HDMI
<b>Control Signal Input Port</b>	S.Bus UART Ethernet UDP / TCP
<b>High Accuracy 3 Axis Stabilization</b>	Yaw Pitch Roll
<b>Working Voltage</b>	11 ~ 25.2 V (3S to 6S)
<b>Power Consumption</b>	Average 5 W Summit 12 W
<b>Waterproof Level</b>	IP4X
<b>Working Temperature</b>	-10 ~ 50 °C
<b>Dimension</b> (Quick Release Board Included)	132 x 100 x 180 mm
<b>Weight</b> (Quick Release Board Included)	668 g

### ZR30 Quick Release Anti-Vibration Board

<b>Dimension</b>	82 x 65 x 20 mm
<b>Weight</b>	38 g

### Gimbal

<b>Angular Vibration Range</b>	$\pm 0.01^\circ$
<b>Controllable Pitch Angle</b>	$-90^\circ \sim +25^\circ$
<b>Controllable Yaw Angle</b>	$-270^\circ \sim +270^\circ$
<b>Rotatable Roll Angle</b>	$-45^\circ \sim +45^\circ$

### Camera

<b>Lens</b>	30X Optical Zoom (180X Hybrid Zoom)
<b>Focal Length</b>	4.5 ~ 148.4 mm ( $\pm 5\%$ )
<b>Image Sensor</b>	1/2.7 Inch Sony CMOS 8 MP Effective Resolution
<b>Aperture</b>	F1.3 ~ 2.8 ( $\pm 5\%$ )
<b>FOV</b>	Without Zoom: Diagonal 65.4°, Horizontal 58.1° 30X Optical Zoom: Diagonal 2.5°, Horizontal 2.1°
<b>Video Recording Resolution</b>	4K (3840 x 2160) @ 25 fps 2K (2560 x 1440) @ 30 fps 1080p (1920 x 1080) @ 30 fps 720p (1280 x 720) @ 30 fps
<b>Still Photo Resolution</b>	4K (3840 x 2160)
<b>Video Storage Bitrate</b>	12 Mbps (H.265 Codec)
<b>Supported File System</b>	FAT32 ExFAT
<b>Image Format</b>	JPG
<b>Video File Format</b>	MP4
<b>Supported MicroSD Cards</b>	MicroSD Class10, max 128 GB
<b>Still Photography Mode</b>	Single
<b>Metering Mode</b>	Evaluative metering
<b>White Balance</b>	Automatic

### Mark

To make sure that you get smoothly recorded video, please format the SD card, and make the minimum storage unit as 64 KB before recording.

Please format the SD card to FAT32 before camera firmware upgrade.



## 1.4 Packing List

1 x ZR30 Optical Pod

1 x ZR30 Quick Release Board

1 x MK15 / HM30 Air Unit S.Bus Y Cable

(Connect SIYI MK15 and HM30 air unit's S.Bus port to acquire control signal, then one connector of the cable goes to SIYI gimbal, another goes to flight controller)

1 x 3 in 1 Control Cable

(A universal cable for ZT30, ZR30, and A8 mini, it connects SIYI gimbal's control signal port with SIYI link and controller, including UART control input, S.Bus input and output)

1 x SIYI Gimbal Power Cable

(Power supply cable for SIYI gimbal)

1 x SIYI Gimbal Ethernet Cable

(A backup cable for customer DIY purpose to connect SIYI gimbal to third-party Ethernet devices)

1 x SIYI Gimbal to SIYI Link Cable

(An all-in-one cable for only touch screen control to SIYI gimbal through SIYI link, it can power SIYI gimbal and can also transfer video stream and control signal)

1 x SIYI Gimbal Ethernet to RJ45 Cable

(Connect SIYI gimbal with RJ45 device directly)

1 x SIYI Gimbal to PX4 / ArduPilot Flight Controller UART Cable

(A universal cable for ZT30, ZR30, and A8 mini, it connects SIYI gimbal to the UART port on PX4 / ArduPilot flight controller for data communication and gimbal control)

1 x ZT30 / ZR30 Screw Pack

(Using with the fixing board to mount ZT30 quick release anti-vibration claw and ZR30 quick release anti-vibration board, including 6 x Hex Socket Large Flat Head Cap Screw TM3\*8)

## 1.5 Indicator Definition


The status indicator on SIYI gimbal uses three different colors and different blinking frequencies to indicate the system's working or abnormal status.

- Solid Green: Normally working.
- Slow Green Blinks: S.Bus signal input is normal.
- ● Double Green Blinks: Integrating flight controller attitude data is normal.
- Slow Red Blinks: One of or all the firmware does not match (camera firmware, gimbal firmware, zoom firmware).
- ● ● Triple Red Blinks: Failed to identify zoom module (for optical zoom gimbal camera only).
- ● ● Red-Red-Yellow Blinks Continuously: Failed to identify camera board.
- Yellow Blinks: Power input voltage is low (lower than 10 V).
- ● Double Red Blinks: IMU temperature rising is abnormal.
- ● Double Yellow Blinks: IMU temperature is rising.
- ● ● Triple Yellow Blinks: IMU temperature is abnormal.

## 2 GET READY TO USE ZR30

### 2.1 Installation

#### Screw Holes' Position and Distance

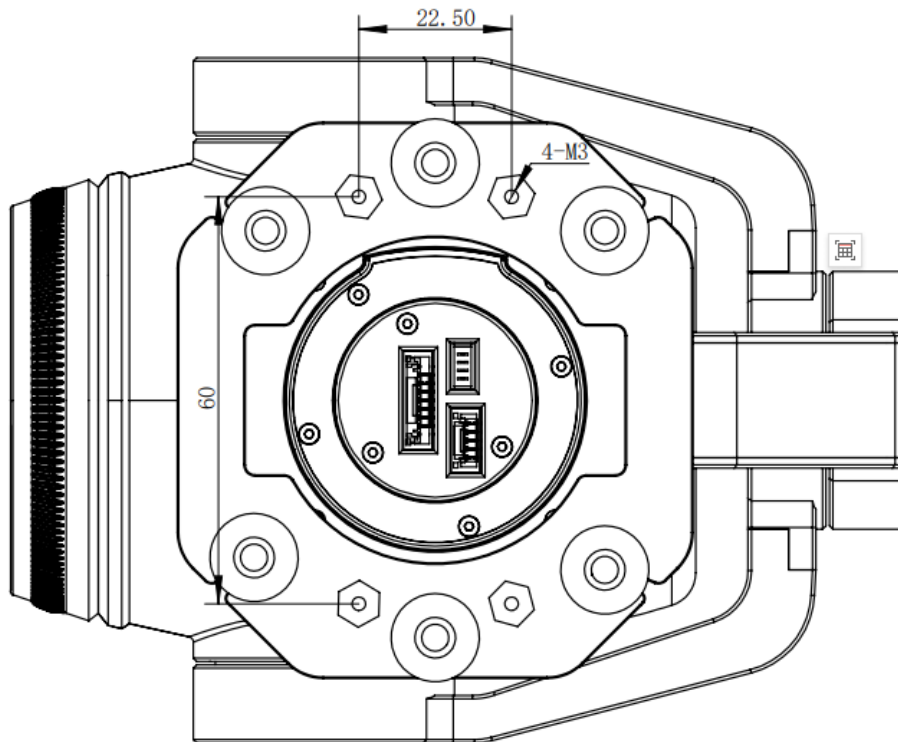

#### Mark

The specs of the screws for fixing the four tube screws are M.3\*8 mm. Quantity: 4.

Welcome to contact SIYI to get the SIYI Gimbal 3D Model for pre-installation.

## 2.2 Connection and Power

SIYI optical pod and gimbal camera can be powered in many ways. If you plan to carry SIYI gimbal by your plane and the plane may roll in a wide margin, then please use connect SIYI gimbal's power port directly by a 3S to 6S power battery, not through power distribution board or air unit.

## 2.3 Interesting Functions and Cautions

SIYI optical pod and gimbal camera support abundant interesting functions.

### 2.3.1 Capture with Time and Location Information

SIYI optical pod and gimbal camera can save time and location information into captured pictures in EXIF format. The preconditions that the function will work are:

- Time Information: The ground station must connect to internet and run the latest SIYI FPV app.
- Location Information: Gimbal must be communicating with the flight controller through UART.

#### Mark

Location information can only be acquired from Mavlink protocol at this moment.

The above functions are only available in SIYI optical pods and gimbal cameras which support capturing pictures and TF card recording and can communicate with the flight controller (ZT30, ZT6, ZR30, A8 mini, ZR10).

### **2.3.2 Point to Focus & Focus Tracking**

#### Point to Focus


The zoom camera in ZT30 four-sensor optical pod support selecting focus and focusing to a point on any place in the image while SIYI FPV or SIYI QGroundControl app is running. Fast and accurate.

#### Focus Tracking

The zoom camera in ZT30 four-sensor optical pod automatically adjust focal length during optical zooming to keep filming smooth and clear images.

### **2.3.3 Output Four Video Streams from the Same RTSP Addresses**

SIYI optical pod (gimbal camera) can output up to four video streams from the same RTSP addresses.

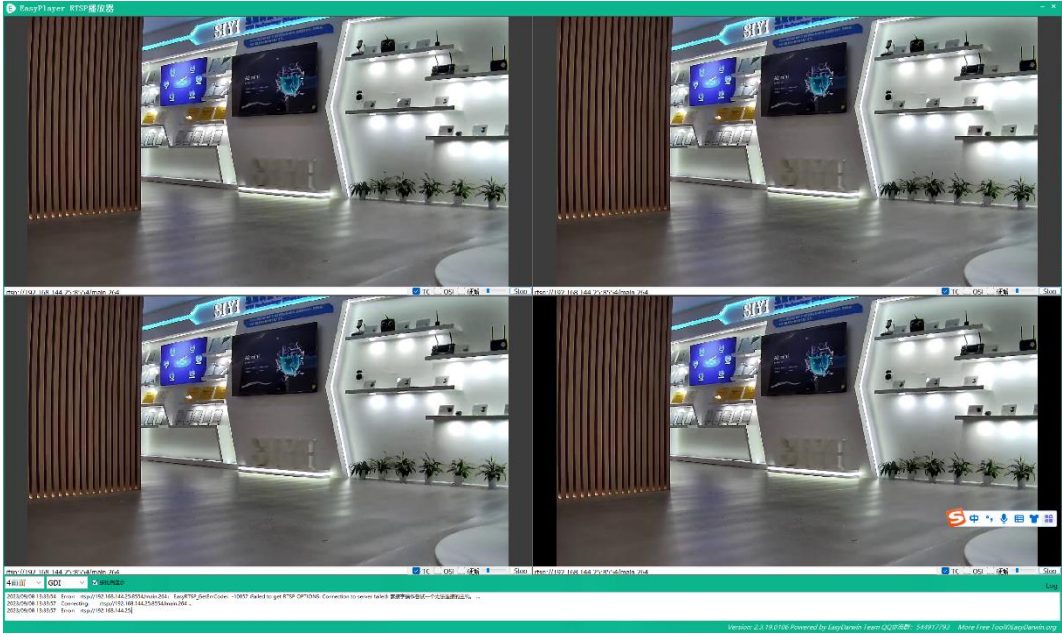

## 3 GIMBAL CONTROL

SIYI optical pod (gimbal camera) support multiple methods to control.



### 3.1 Enable AI Recognition, Tracking, and Follow through SIYI AI Tracking Module Using SIYI Optical Pod (Gimbal Camera) and SIYI Link

SIYI optical pod (gimbal camera) can connect to SIYI link through SIYI AI tracking module and enable AI recognition, tracking, and follow feature through SIYI FPV app or SIYI QGC app while the air unit is communicating with the ground unit.

It is necessary to prepare the tools, firmware, and software below before controlling gimbal camera in this way.

- SIYI Links (MK32 Standard Combo / HM30 / MK15 Enterprise Standard Combo is suggested for excellent compatibility with SIYI gimbal cameras)
- SIYI Optical Pod (Gimbal Camera)
- Flight Controller
- SIYI AI Tracking Module

#### **Mark**

Above products can be purchased from SIYI directly or from SIYI authorized dealers.

- SIYI Gimbal to SIYI Link Cable

#### **Mark**

Above tools come with product package.


- SIYI FPV App (v2.5.15.695 or latest version)
- SIYI QGC App

## Mark


Above software can be downloaded from relevant product page on SIYI official website.

## Steps


1. Confirm if gimbal camera's firmware has been upgraded to be compatible with SIYI AI tracking module and the AI follow function.
2. Confirm if SIYI FPV app has been upgraded to be compatible with SIYI AI tracking module and the AI follow function.
3. Please refer to the picture below to connect SIYI AI tracking module with SIYI gimbal camera and SIYI link.

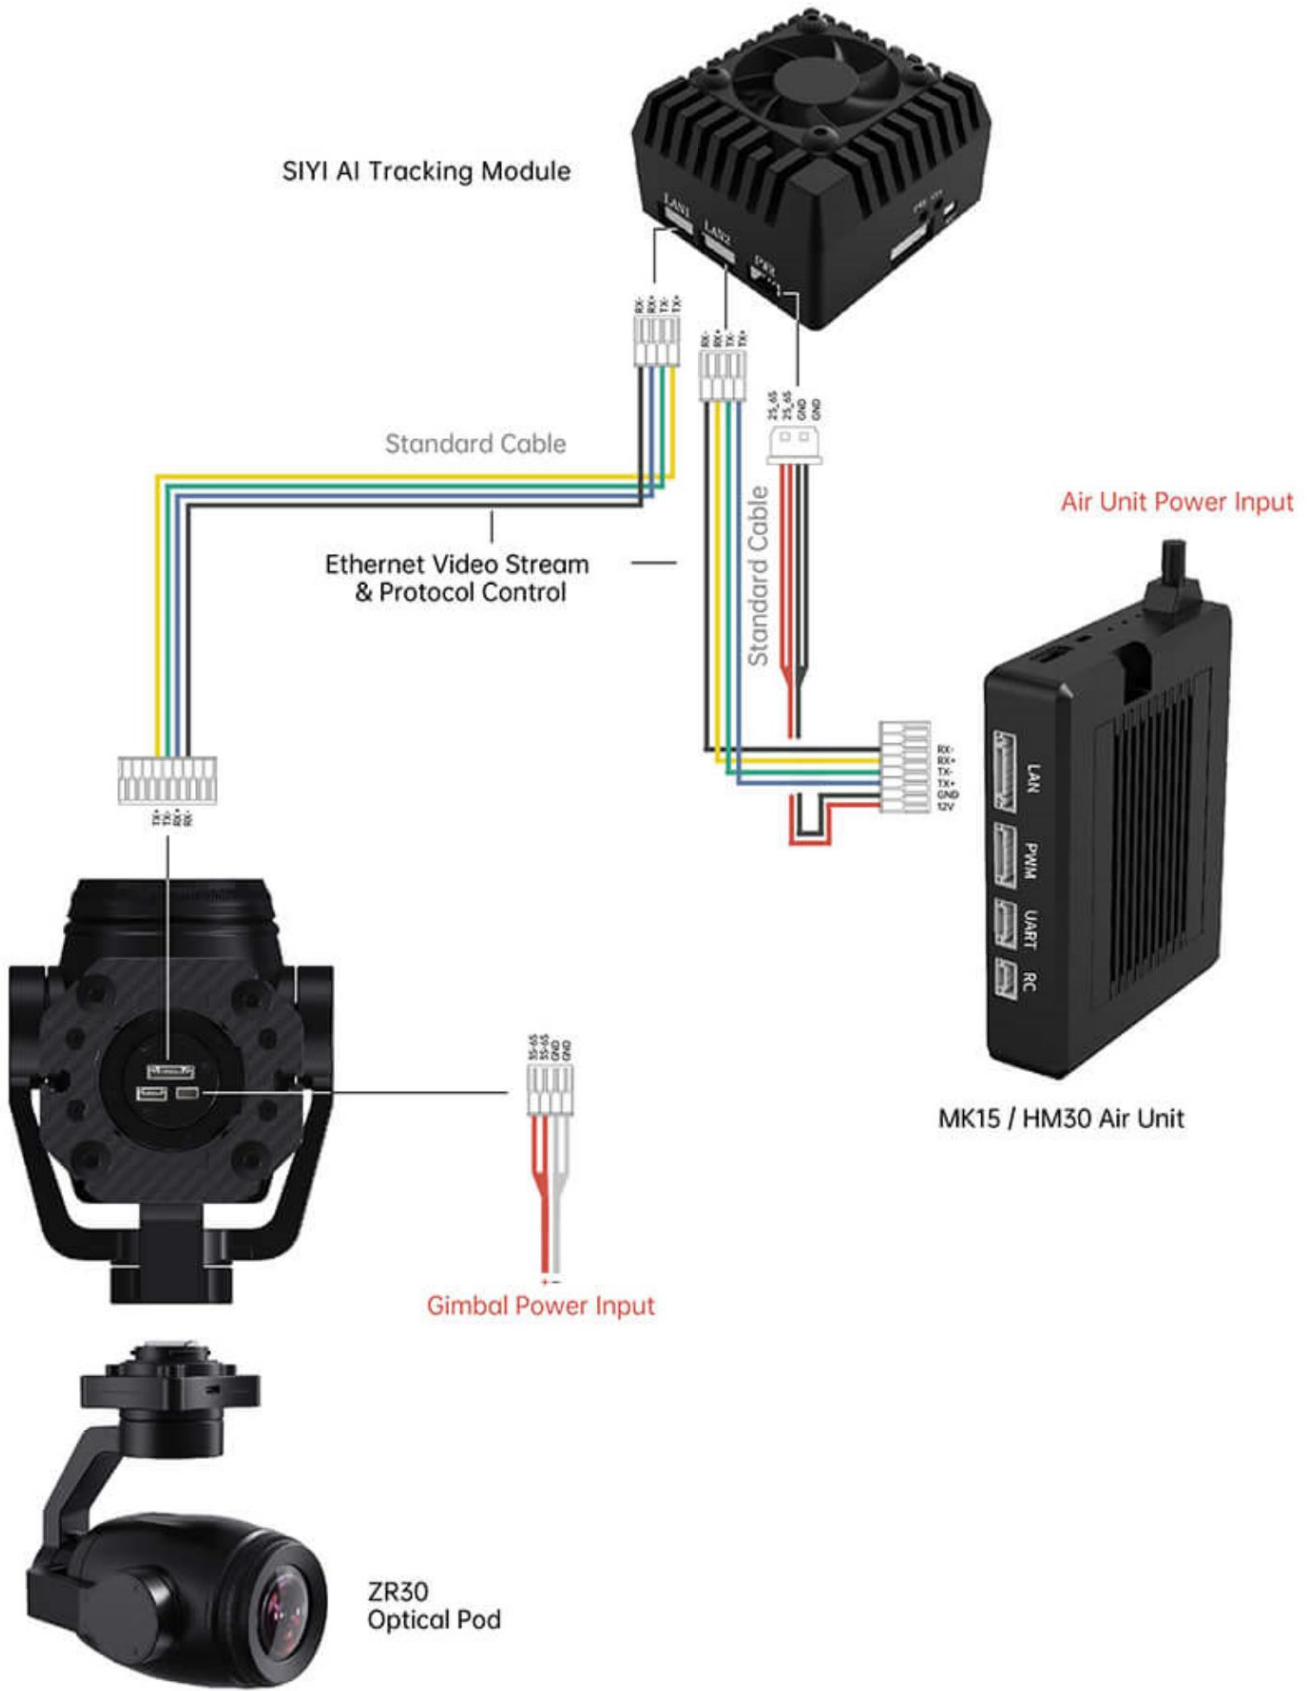

4. Please refer to the picture below to connect SIYI gimbal camera with flight controller and integrate attitude data.

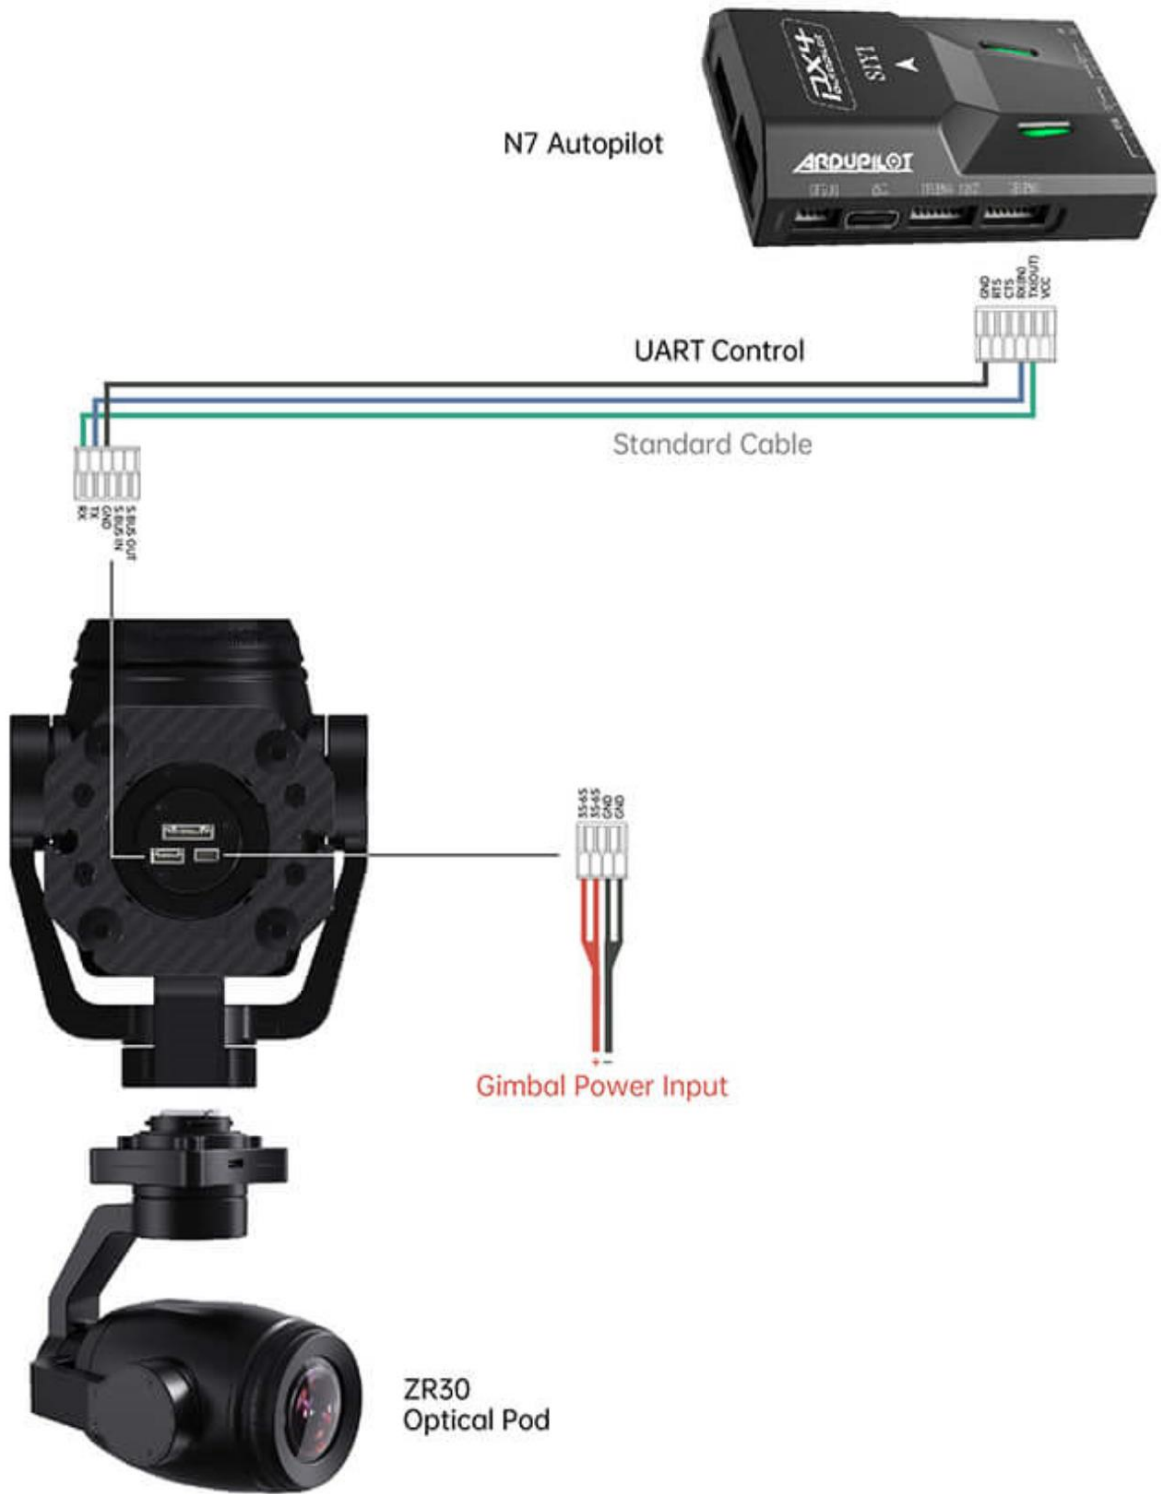


5. Run SIYI FPV app, go to “Settings - Addresses”, and select “SIYI AI Camera”.

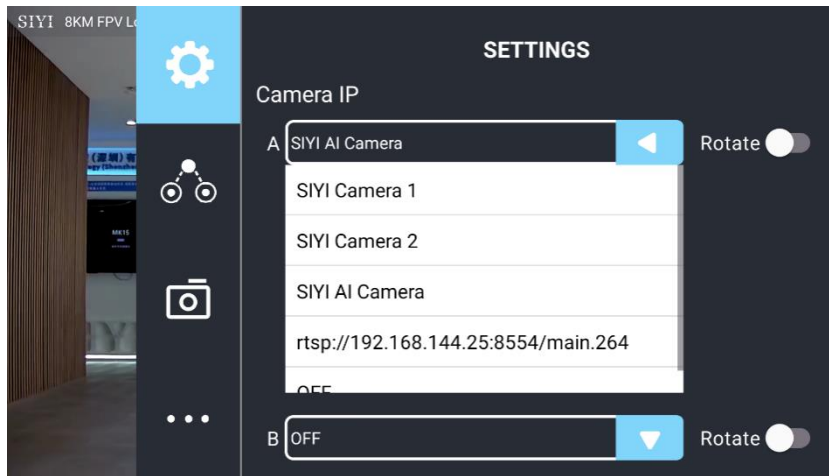

6. Return to main image, touch the AI tracking function button to enable the function.

7. Confirm if the flight controller integration button shows up (which means flight controller attitude data is integrated).

8. Switch flight mode to “Guided” and configure the max flight speed.

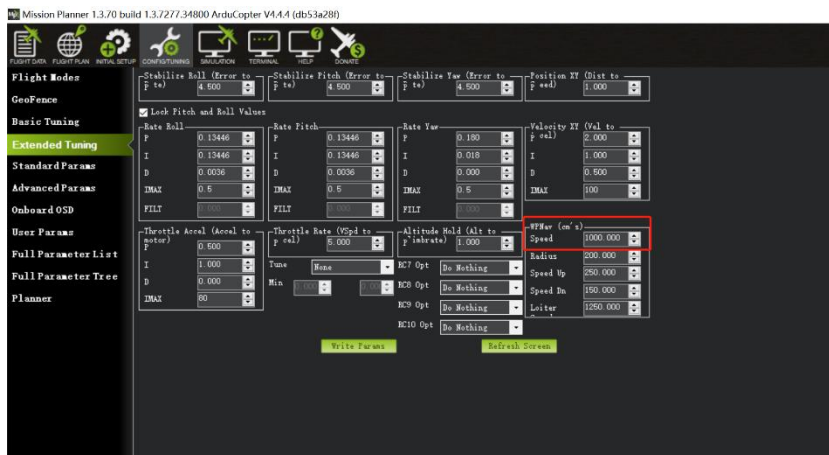

9. Touch the AI tracking / follow button again to disable the function.



## **DANGER**

Considering flight safety, it is recommended to use the AI follow function and obstacle avoidance function together.

When the AI follow function is activated, the operator will not be able to manually control the flight, and the ground station cannot use the guided mode to control the aircraft. Switching flight mode can regain control.

When the AI follow function is activated, please ensure that the view on the follow route is clear and free of obstacles, and always pay attention to flight safety. When encountering obstacles, please immediately take over the flight manually and re-plan the route.

When the tracking target is lost, the aircraft will hover.

## **Mark**

Using SIYI AI tracking module with multiple-sensor optical pods, in SIYI FPV app, the main stream of the optical pod should be configured as zoom camera.

When the tracked object is higher than the multi-rotor drone on the horizontal plane, AI

follow function does not work; when the tracked object and the multi-rotor drone are on the same horizontal plane, AI follow function works best.

## 3.2 Control SIYI Optical Pod (Gimbal Camera) in SIYI FPV App or SIYI QGC App through SIYI link

SIYI optical pod (gimbal camera) can connect to SIYI link directly to control gimbal rotation, gimbal functions, and video display in SIYI FPV app or SIYI QGC app when the air unit is communicating with the ground unit.





### 3.2.1 Preparation

It is necessary to prepare the tools, firmware, and software below before controlling gimbal camera in this way.

- SIYI Links (MK32 Standard Combo / HM30 / MK15 Enterprise Standard Combo is suggested for excellent compatibility with SIYI gimbal cameras)
- SIYI Optical Pod (Gimbal Camera)

#### Mark

Above products can be purchased from SIYI directly or from SIYI authorized dealers.

- SIYI Gimbal to SIYI Link Cable

#### Mark

Above tools come with product package.

- SIYI FPV App (v2.5.15.691 or latest version)
- SIYI QGC App

#### Mark

Above software can be downloaded from relevant product page on SIYI official website.

### SIYI FPV App Steps

1. Power the air unit and bind it with the ground unit.
2. Use SIYI Gimbal to SIYI Link Cable to connect the air unit's Ethernet port to the gimbal camera's Ethernet port.
3. Update SIYI FPV app to the latest.
4. Run SIYI FPV app, go to "Settings" and select the relevant SIYI camera type with main / sub stream, video stream will display. Gimbal motion and camera functions can be controlled by the application.

## **SIYI QGC App Steps**

1. Power the air unit and bind it with the ground unit.
2. Use SIYI Gimbal to SIYI Link Cable to connect the air unit's Ethernet port to the gimbal camera's Ethernet port.
3. Run SIYI QGC app, go to "Comm Links – Video Settings", and select "RTSP Video Stream" for "Source", then enter the default RTSP addresses of SIYI gimbal camera, video stream will display. Gimbal motion and camera functions can be controlled by the application.

### **3.2.2 Gimbal Pitch and Yaw Rotation**

While SIYI FPV App or SIYI QGC app is running,

Sliding on touchscreen can control gimbal rotation. Sliding left and right are yaw rotation, up and down are gimbal pitch rotation.

Double tap touchscreen, gimbal will automatically center.

### Mark

Slide on touchscreen and hold it, gimbal will continue rotating till it reaches physical limit.

Farther that you hold it from the center of the screen, faster the gimbal rotates.

### 3.2.3 Zoom and Focus

While SIYI FPV App or SIYI QGC app is running,

Touching “Zoom in” or “Zoom out” icon on can control the zoom camera.

Click the touchscreen once, optical zoom gimbal camera will focus automatically.

### 3.2.4 Take pictures and Record Video

While SIYI FPV App or SIYI QGC app is running,


Touch “Photo” icon once on to take a picture. Touch “Record” icon to start video recording. Touch “Recording” icon to stop video recording.

### Mark

Before taking a picture or recording video, it is necessary to insert SD card into the camera.

### 3.3 Control SIYI Optical Pod (Gimbal Camera) in SIYI QGC (Windows) Software through SIYI Link

SIYI optical pod (gimbal camera) can connect to SIYI link directly to control gimbal rotation, gimbal functions, and video display in SIYI QGC Windows software when the air unit is communicating with the ground unit.

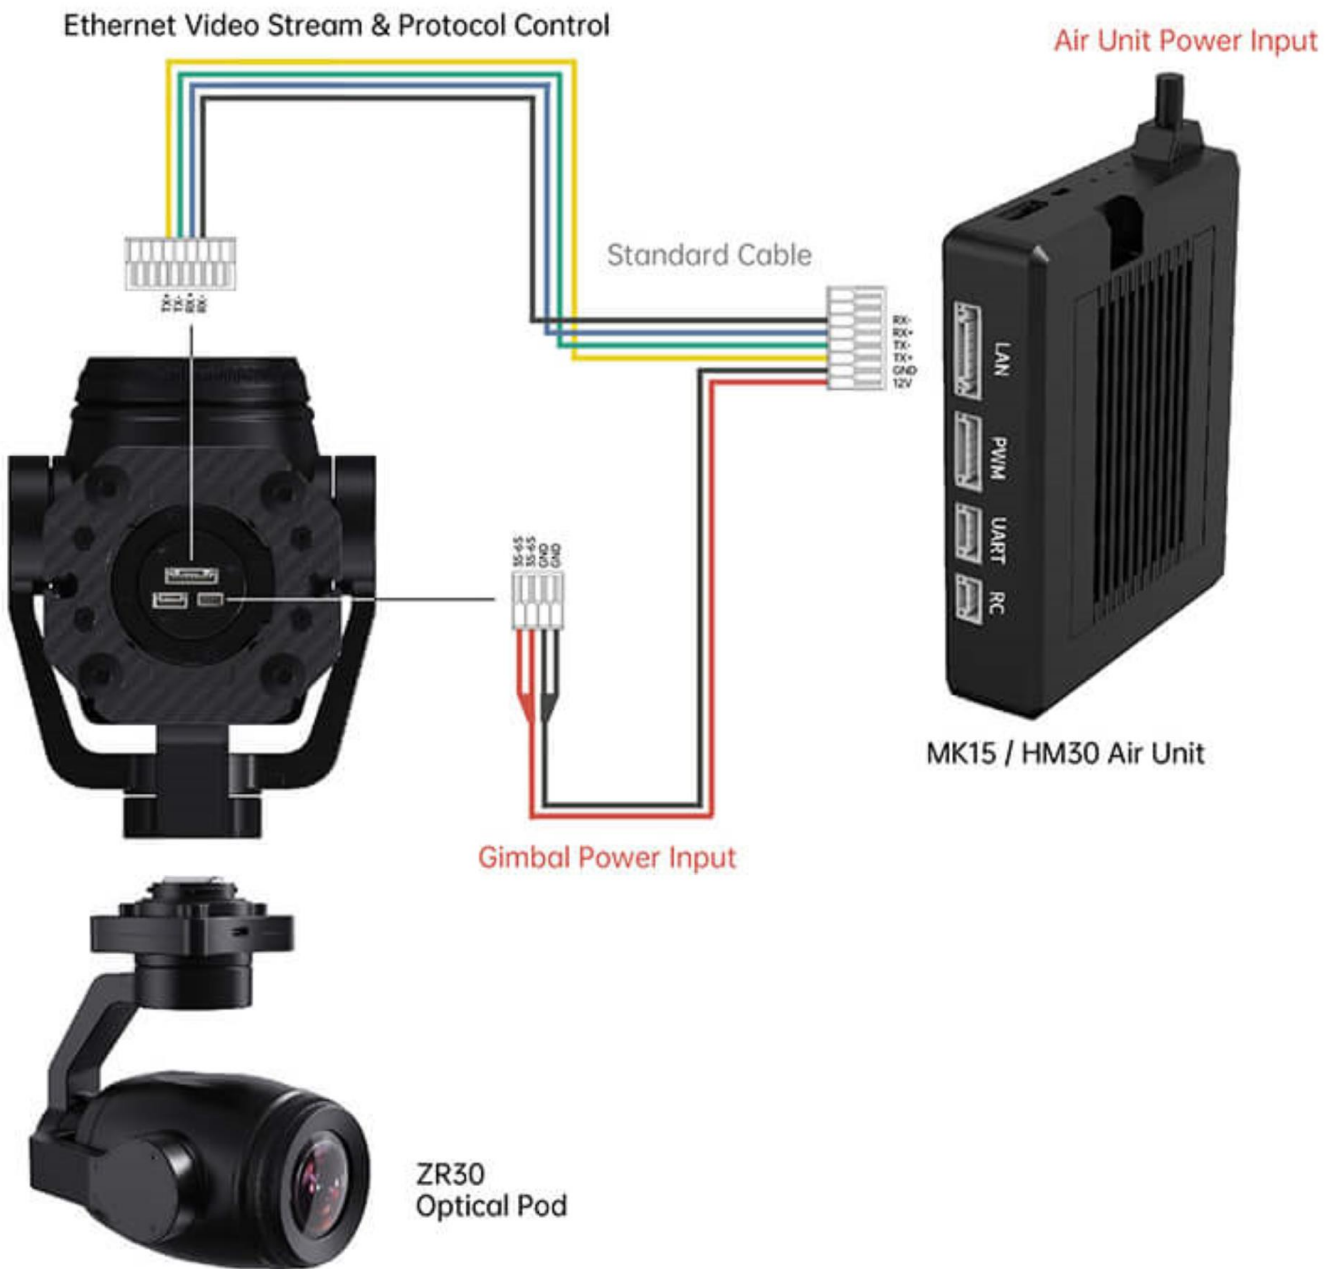

### 3.3.1 Preparation

It is necessary to prepare tools, firmware, and software below before controlling gimbal camera in this way.

- SIYI Links (MK32 Standard Combo / HM30 / MK15 Enterprise Standard Combo is suggested for excellent compatibility with SIYI gimbal cameras)
- SIYI Optical Pod (Gimbal Camera)

#### Mark

Above products can be purchased from SIYI directly or from SIYI authorized dealers.

- SIYI Gimbal to SIYI Link Cable

#### Mark

Above tools come with product package.

- SIYI QGC Windows Software

#### Mark

Above software can be downloaded from relevant product page on SIYI official website.

### Steps

1. Power the air unit and bind it with the ground unit.

2. Use SIYI Gimbal to SIYI Link Cable to connect the air unit's Ethernet port with the gimbal's Ethernet port.
3. Then connect the ground unit of the SIYI link to the Windows computer.
4. Modify the computer's Ethernet settings to have the same gateway with SIYI link and avoid IP addresses conflict.

For example, let's assign "192.168.144.30" for the computer IP addresses.



5. Run SIYI QGC Windows software, go to "Comm Links – Video Settings", and select "RTSP Video Stream" for "Source", then enter the default RTSP addresses of SIYI gimbal camera, video stream will display. Gimbal motion and camera functions can be controlled by mouse in QGroundControl.

### 3.3.2 Gimbal Pitch and Yaw Rotation

While SIYI QGC Windows software is running,

Drag the mouse on screen can control gimbal rotation. Dragging the mouse left and right are yaw rotation, up and down are pitch rotation.

Double click the mouse on screen, gimbal will automatically center.

#### Mark

Drag the mouse on screen and hold it, gimbal will continue rotating unless there is a physical stop. Farther you hold it from the center of the screen, faster the gimbal rotates.

### 3.3.3 Zoom and Focus

While SIYI QGC Windows software is running,

Clicking “Zoom in” or “Zoom out” icon on can control the zoom camera.

Click on screen, optical zoom camera will focus automatically.

### 3.3.4 Take pictures and Record Video

While SIYI QGC Windows software is running,

Click “Photo” icon once on to take a picture. Click “Record” icon to start video recording. Click “Recording” icon to stop video recording.

 **Mark**

Before taking a picture or recording video, it is necessary to insert SD card into gimbal camera.



## 3.4 Control SIYI Optical Pod (Gimbal Camera) by S.Bus Signal and Forward S.Bus Signal to Flight Controller through SIYI Link

SIYI optical pod (gimbal camera) can be connected to the air unit of SIYI link and the flight controller simultaneously for attitude control through joysticks, dials, switches, and buttons on a remote controller or on an SIYI handheld ground station.



### 3.4.1 Preparation

It is necessary to prepare tools, firmware, and software below before controlling gimbal camera in this way.

- SIYI Links (MK32 Standard Combo / HM30 / MK15 Enterprise Standard Combo is suggested for excellent compatibility with SIYI gimbal cameras)
- SIYI Optical Pod (Gimbal Camera)

#### Mark

Above products can be purchased from SIYI directly or from SIYI authorized dealers.

- SIYI Gimbal to SIYI Link Cable
- 3 in 1 Control Cable (For ZT30, ZT6, ZR30, and A8 mini)
- MK15 / HM30 Air Unit S.Bus Y Cable

#### Mark

Above tools come with product package.

- Cable (USB-C to USB-A)

#### Mark

Above tools should be prepared by customer.


- SIYI PC Assistant (v1.3.9 or latest version)

## Mark

Above software can be downloaded from relevant product page on SIYI official website.

## Steps

1. Power the air unit and bind it with the ground unit.
2. Use SIYI Gimbal to SIYI Link Cable to connect the air unit's Ethernet port with gimbal's Ethernet port.
3. Wire the 3 in 1 Control Cable with the MK15 / HM30 Air Unit S.Bus Y Cable.
4. Then use the combined cable to connect the air unit's RC port and the gimbal's control signal port.
5. Install and run SIYI PC Assistant on Windows computer.
6. Use the USB-C to USB-A cable to connect the gimbal to the computer, then run SIYI PC Assistant and go to "Gimbal Config" page.

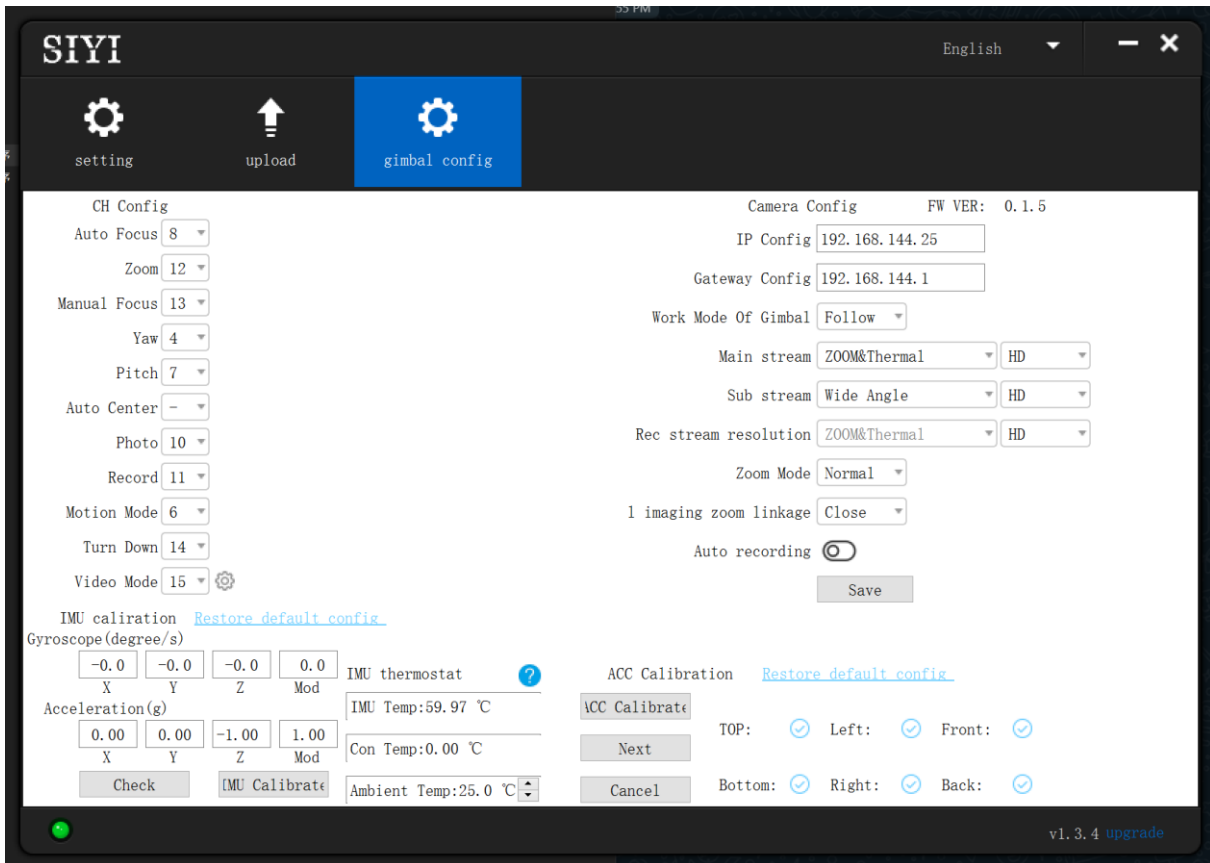

7. Under “Channel Config” page, assign the communication channel 1 to 16 to target gimbal and camera functions according to your requirement.
8. For the assigned channels, operate their mapped joysticks, dials, switches, and buttons on the handheld ground station to confirm if they are working normally.

### 3.4.2 Gimbal Pitch and Yaw Rotation (Taking an example of Dial Control)

Below is suggested channel mapping settings for testing, customers are free to assign channel mappings as required through SIYI TX app.

- Channel 7 = Left Dial (Reversed)
- Channel 8 = Right Dial
- Channel 12 = Any Button

In SIYI PC Assistant, map “Yaw” function to channel 7 and “Pitch” to channel 8, “Center” to channel 12.

Then, if you operate the left dial, gimbal will rotate on yaw axis. If you operate the right dial, gimbal will rotate on pitch axis. Press the button, gimbal will center itself automatically.

### Mark

Hold the dial from its center position, gimbal will keep rotating unless there was a physical limit. Farther you hold it away from center, faster gimbal rotates.

### 3.4.3 Zoom and Focus (Taking an Example of Switch Control)

Below are the suggested channel mapping settings for testing, customers are free to assign channel mappings as required through SIYI TX app.

- Channel 13 = A Switch
- Channel 14 = B Switch

In SIYI PC Assistant, map “Zoom” function to channel 13, map “Auto Focus” function to channel 14.

Then, if you operate switch A, camera will zoom in or zoom out. If you operate switch B, optical zoom camera will focus automatically.

### 3.4.4 Take Pictures and Record Video (Taking an Example of Button Control)

Below are the suggested channel mapping settings for testing, customers are free to assign channel mappings as required through SIYI TX app.

- Channel 9 = Button A
- Channel 10 = Button B

In SIYI PC Assistant, map “Photo” function to channel 9 and “Record” to channel 10.

Then, if you press button A, camera will take a picture. If you press button B, camera will start or stop video recording.

#### **Mark**

Before taking pictures or recording video, it is necessary to insert SD card into the camera.

## 3.5 UART / UDP Control (SIYI Gimbal SDK)

SIYI gimbal camera provides control protocol for all customers. Please refer to the below guide for secondary development based on SIYI gimbal camera.

### 3.5.1 SDK Protocol Format

Field	Index	Bytes	Description
STX	0	2	0x6655: starting mark. <b>Low byte in the front</b>
CTRL	2	1	0: need_ack (if the current data pack need “ack”) 1: ack_pack (if the current data pack is an “ack” package) 2-7: reserved
Data_len	3	2	Date field byte length <b>Low byte in the front</b>
SEQ	5	2	Frame sequence (0 ~ 65535) <b>Low byte in the front</b>
CMD_ID	7	1	Command ID
DATA	8	Data_len	Data
CRC16		2	CRC16 check to the complete data package. <b>Low byte in the front</b>

### 3.5.2 SDK Communication Commands

#### TCP Heartbeat

CMD_ID:0x00-----TCP Heartbeat			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
			No ack

Mark:

1. Heartbeat pack: 55 66 01 01 00 00 00 00 00 59 8B
2. **Only available for TCP protocol.**

### Request Gimbal Camera Firmware Version

CMD_ID:0x01-----Request Gimbal Camera Firmware Version			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
	uint32_t	code_board_ver	Camera firmware version
	uint32_t	gimbal_firmware_ver	Gimbal firmware version
	uint32_t	zoom_firmware_ver	Zoom firmware version

Eg: 0x6E030203 = firmware version v3.2.3

Mark:

1. Ignore the 4<sup>th</sup> byte (higher byte)
2. **Zoom firmware version is only available for optical zoom cameras such as ZR10, ZR30, and ZT30 at this moment.**

### Request Gimbal Camera Hardware ID

CMD_ID:0x02-----Request Gimbal Camera Hardware ID			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
	Uint8_t	hardware_id[12]	Hardware ID character string (10 digits)

Mark:

The first two digits of the hardware ID character string indicates product model number in hexadecimal.

- 0x6B: ZR10
- 0x73: A8 mini
- 0x75: A2 mini
- 0x78: ZR30
- 0x82: ZT6
- 0x7A: ZT30

### Request Gimbal Camera's Present Working Mode

CMD_ID:0x19-----Request Gimbal Camera's Present Working Mode			
Send data format			
No.	Data Type	Data Name	Description



ACK data format			
1	uint8_t	gimbal_mode	00: Lock Mode 01: Follow Mode 02: FPV Mode

## Auto Focus

CMD_ID:0x04-----Auto Focus			
Send data format			
No.	Data Type	Data Name	Description
	uint8_t	auto_focus	1: Start auto focus for once
	uin16_t	touch_x	x coordinates, the range is the length of the video stream resolution
	uin16_t	touch_y	y coordinates, the range is the height of the video stream resolution
ACK data format			
1	uint8_t	sta	1: Success 0: Failure

### Mark:

1. Auto focus command is only available for optical zoom gimbal cameras like ZT30, ZR30, and ZR10 at this moment.
2. Under split image, the effective value of the x coordinates is a half of the length of the video stream resolution.

## Manual Zoom and Auto Focus

CMD_ID:0x05-----Manual Zoom and Auto Focus			
Send data format			
No.	Data Type	Data Name	Data Description
1	int8_t	zoom	1: Start zooming in 0: Stop zooming in / out (send when released from control command) -1: Start zooming out
ACK data format			
	uint16_t	zoom_multiple	Current (hybrid) zoom multiples (zoom_multiple / 10, accuracy is one decimal point)

### Mark:

1. Manual zoom and auto focus command is only available for optical zoom gimbal cameras like ZT30, ZR30, and ZR10 at this moment.
2. Under this command, ZT6 and A8 mini can only do manual zoom but cannot do auto focus.

## Absolute Zoom and Auto Focus

CMD_ID:0x0F-----Absolute Zoom and Auto Focus			
Send data format			
No.	Data Type	Data Name	Data Description
1	uint8_t	Absolute_movemen t_int	Input the integer part of the target multiple (0X1 ~ 0X1E)
2	uint8_t	Absolute_movemen t_float	Input the fractional part of the target multiple (0X0 ~ 0X9)
ACK data format			
	uint8_t	Absolute_movemen t_ask	Success and return to 1

### Mark:

1. Absolute zoom command is only available for optical zoom gimbal cameras like ZT30, ZR30, and ZR10 at this moment.
2. Under this command, ZT6 and A8 mini can only do absolute zoom but cannot do auto focus.

## Request the Max Zoom Value in Present

CMD_ID:0x16-----Request the Max Zoom Value in Present			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
	uint8_t	zoom_max_int	Integer of the max zoom value in present
	uint8_t	zoom_max_float	Float of the max zoom value in present

### Mark:

This command is available for zoom gimbal cameras.

## Request the Zoom Value in Present

CMD_ID:0x18-----Acquire the Zoom Value in Present			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
	uint8_t	zoom_int	Integer of the zoom value in present
	uint8_t	zoom_float	Float of the zoom value in present

**Mark:**

This command is available for zoom gimbal cameras.

**Manual Focus**

CMD_ID:0x06-----Manual Focus			
Send data format			
No.	Data Type	Data Name	Description
1	int8_t	focus	1: Long shot 0: Stop manual focus (send when released from control command) -1: Close shot
ACK data format			
	uint8_t	sta	1: Success 0: Fail

**Mark:**

Auto focus command is only available for optical zoom gimbal cameras like ZT30, ZR30, and ZR10 at this moment.

**Gimbal Rotation**

CMD_ID:0x07-----Gimbal Rotation			
Send data format			
No.	Date Type	Date Name	Description
1	int8_t	turn_yaw	-100~0~100: Negative and positive represent two directions, higher or lower the number is away from 0, faster the rotation speed is. Send 0 when released from control command and gimbal stops rotation.
2	int8_t	turn_pitch	-100~0~100: Same as above
ACK data format			
	uint8_t	sta	1: Success 0: Fail

**Center**

CMD_ID:0x08-----Center			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	center_pos	1: gimbal centers to position 0

ACK data format			
1	uint8_t	sta	1: Success 0: Fail

## Request Gimbal Configuration Information

CMD_ID:0x0A-----Request Gimbal Configuration Information			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint8_t	reserved	
2	uint8_t	hdr_sta	0: HDR OFF 1: HDR ON
3	uint8_t	reserved	
4	uint8_t	record_sta	0: Recording OFF 1: Recording ON 2: TF card slot is empty 3: (Recording) Data loss in TF card recorded video, please check TF card
5	uint8_t	gimbal_motion_mode	0: Lock Mode 1: Follow Mode 2: FPV Mode
6	uint8_t	gimbal_mounting_dir	Gimbal Mounting Method 0: Reserved 1: Normal 2: Upside Down
7	uint8_t	video_hdmi_or_cvbs	<b>(Only available on ZT6 and A8 mini)</b> Video output status of HDMI and CVBS: 0: HDMI output ON CVBS output OFF 1: HDMI output OFF CVBS output ON

## Function Feedback Information

CMD_ID:0x0B-----Function Feedback Information			
Send data format			
No.	Data Type	Data Name	Description

ACK data format			
1	uint8_t	info_type	0: Success 1: Fail to take a photo (Please check if TF card is inserted) 2: HDR ON 3: HDR OFF 4: Fail to record a video (Please check if TF card is inserted)

### Photo and Record

CMD_ID:0x0C-----Photo and Record			
Send data format			
No.	Data Type	Data Name	Description
	uint8_t	func_type	0: Take a picture 1: Switch on / off HDR (not supported yet) 2: Start / Stop Recording 3: Motion – Lock Mode 4: Motion – Follow Mode 5: Motion – FPV Mode 6: Set video output as HDMI (Only available on ZT6 and A8 mini, restart gimbal to take effect) 7: Set video output as CVBS (Only available on ZT6 and A8 mini, restart gimbal to take effect) 8: Turn off both HDMI and CVBS video output (Only available on ZT6 and A8 mini, restart gimbal to take effect)
ACK data format			
			No ack

### Request Gimbal Attitude

CMD_ID:0x0D-----Request Gimbal Attitude			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
	int16_t	yaw	Yaw axis degree
	int16_t	pitch	Pitch axis degree
	int16_t	roll	Roll axis degree
	int16_t	yaw_velocity	Yaw axis rotation speed

	int16_t	pitch_velocity	Pitch axis rotation speed
	int16_t	roll_velocity	Roll axis rotation speed

Mark:

1. The above data to be divided by 10 is the actual degree, accuracy in one decimal place.
2. It is suggested to use the command "0x25" to configure the sending frequency of gimbal attitude data in certain frequency continuously and actively.

## Send Control Angle to Gimbal

CMD_ID:0x0E-----Send Control Angle to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
	int16_t	yaw	Target yaw angle
	int16_t	pitch	Target pitch angle
ACK data format			
	int16_t	yaw	Current yaw angle
	int16_t	pitch	Current pitch angle
	int16_t	roll	Current roll angle

### Control Angle Range

Yaw:

- ZR10 / A8 mini: -135.0 ~ 135.0 degrees
- ZT6 / ZR30: -270.0 ~ 270.0 degrees
- ZT30: Limitless

Pitch

- ZT30 / ZT6 / ZR30 / ZR10 / A8 mini / A2 mini: -90.0 ~ 25.0 degree

Mark:

1. The accuracy of the control angle is in one decimal place. Eg: Set yaw as 60.5 degrees, the command number should be set as 605.
2. The actual angle data returned to be divided by 10 is the actual degree, accuracy in one decimal place.

## Request Gimbal Camera Codec Specs

CMD_ID:0x20-----Request Gimbal Camera Codec Specs			
Send data format			
No.	Data Type	Data Name	Description
	uint8_t	req_stream_type	0: Recording stream 1: Main stream 2: Sub stream (only available on ZT30 and ZT6)
ACK data format			

	uint8_t	stream_type	0: Recording stream 1: Main stream 2: Sub stream (only available on ZT30 and ZT6)
	uint8_t	VideoEncType	Codec Format 1: H264 2: H265
	uint16_t	Resolution_L	Resolution in length
	uint16_t	Resolution_H	Resolution in height
	uint16_t	VideoBitrate	Video Bitrate in Kbps
	uint8_t	VideoFrameRate	Video frame rate

## Send Codec Specs to Gimbal Camera

CMD_ID:0x21-----Send Codec Specs to Gimbal Camera			
Send data format			
No.	Data Type	Data Name	Description
	uint8_t	stream_type	0: Recording stream 1: Main stream 2: Sub stream (only available on ZT30 and ZT6)
	uint8_t	VideoEncType	Codec Format 1: H264 2: H265
	uint16_t	Resolution_L	Resolution in length: 1920, 1280
	uint16_t	Resolution_H	Resolution in height: 1080, 720
	uint16_t	VideoBitrate	Video Bitrate in Kbps
	uint8_t	reserve	Reserved
ACK data format			
	uint8_t	stream_type	0: Recording stream 1: Main stream 2: Sub stream (only available on ZT30 and ZT6)
	uint8_t	sta	1: Success 0: Failure

## Request Gimbal Camera Image Mode

CMD_ID:0x10-----Request Gimbal Camera Image Type			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			

1	uint8_t	vdisp_mode	<b>Image Mode:</b> 0: Split Screen (Main: Zoom & Thermal. Sub: Wide Angle) 1: Split Screen (Main: Wide Angle & Thermal. Sub: Zoom) 2: Split Screen (Main: Zoom & Wide Angle. Sub: Thermal) 3: Single Image (Main: Zoom. Sub: Thermal) 4: Single Image (Main: Zoom. Sub: Wide Angle) 5: Single Image (Main: Wide Angle. Sub: Thermal) 6: Single Image (Main: Wide Angle. Sub: Zoom) 7: Single Image (Main: Thermal. Sub: Zoom) 8: Single Image (Main: Thermal. Sub: Wide Angle)
---	---------	------------	---

**Mark:**

This command is only available for ZT30 and ZT6 at this moment.

**Send Image Mode to Gimbal Camera**

CMD_ID:0x11-----Send Image Type to Gimbal Camera			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	vdisp_mode	<b>Image Mode:</b> 0: Split Screen (Main: Zoom & Thermal. Sub: Wide Angle) 1: Split Screen (Main: Wide Angle & Thermal. Sub: Zoom) 2: Split Screen (Main: Zoom & Wide Angle. Sub: Thermal) 3: Single Image (Main: Zoom. Sub: Thermal) 4: Single Image (Main: Zoom. Sub: Wide Angle) 5: Single Image (Main: Wide Angle. Sub: Thermal) 6: Single Image (Main: Wide Angle. Sub: Zoom) 7: Single Image (Main: Thermal. Sub: Zoom) 8: Single Image (Main: Thermal. Sub: Wide Angle)
ACK data format			



1	uint8_t	vdisp_mode	<b>Image Mode:</b> 0: Split Screen (Main: Zoom & Thermal. Sub: Wide Angle) 1: Split Screen (Main: Wide Angle & Thermal. Sub: Zoom) 2: Split Screen (Main: Zoom & Wide Angle. Sub: Thermal) 3: Single Image (Main: Zoom. Sub: Thermal) 4: Single Image (Main: Zoom. Sub: Wide Angle) 5: Single Image (Main: Wide Angle. Sub: Thermal) 6: Single Image (Main: Wide Angle. Sub: Zoom) 7: Single Image (Main: Thermal. Sub: Zoom) 8: Single Image (Main: Thermal. Sub: Wide Angle)
---	---------	------------	---

Mark:

This command is only available for ZT30 and ZT6 at this moment.

### Request the Temperature of a Point

CMD_ID:0x12-----Request the Temperature of a Point			
Send data format			
No.	Data Type	Data Name	Description
1	uint16_t	x	x coordinate of the point
2	uint16_t	y	y coordinate of the point
3	uint8_t	get_temp_flag	0: Turn off temperature measuring 1: Measure the temperature once 2: Continuous temperature measuring at 5 Hz
ACK data format			
1	uint16_t	temp	Temperature of the point / 100 (two decimal places)
2	uint16_t	x	X coordinate of the point
3	uint16_t	y	Y coordinate of the point

Mark:

This command is only available for ZT30 and ZT6 at this moment.

### Request the Max / Min Temperature in a Selected Box

CMD_ID:0x13-----Request the Max / Min Temperature in a Selected Box			
Send data format			
No.	Data Type	Data Name	Description
1	uint16_t	startx	X coordinate of the starting point of the box

2	uint16_t	starty	Y coordinate of the starting point of the box
3	uint16_t	endx	X coordinate of the ending point of the box
4	uint16_t	endy	Y coordinate of the ending point of the box
5	uint8_t	get_temp_flag	0: Turn off temperature measuring 1: Measure the temperature once 2: Continuous temperature measuring at 5 Hz
ACK data format			
1	uint16_t	startx	X coordinate of the starting point of the box
2	uint16_t	starty	Y coordinate of the starting point of the box
3	uint16_t	endx	X coordinate of the ending point of the box
4	uint16_t	endy	Y coordinate of the ending point of the box
5	uint16_t	temp_max	The maximum temperature in the box / 100 (two decimal places)
6	uint16_t	temp_min	The minimum temperature in the box / 100 (two decimal places)
7	uint16_t	temp_max_x	X coordinate of the max temperature in the box
8	uint16_t	temp_max_y	Y coordinate of the max temperature in the box
9	uint16_t	temp_min_x	X coordinate of the min temperature in the box
10	uint16_t	temp_min_x	Y coordinate of the min temperature in the box

Mark:

1. Thermal camera supports digital zoom, the temperature measuring box will zoom in and out according to the digital zoom multiples. Under digital zoom, the temperature measuring range should refer to the box responded by the camera.
2. This command is only available for ZT30 and ZT6 at this moment.

## Request the Max / Min Temperature in the Full Image

CMD_ID:0x14-----Request the Max / Min Temperature in the Full Image			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	get_temp_flag	0: Turn off temperature measuring 1: Measure the temperature once 2: Continuous temperature measuring at 5 Hz
ACK data format			

1	uint16_t	temp_max	The maximum temperature in the full image / 100 (two decimal places)
2	uint16_t	temp_min	The minimum temperature in the full image / 100 (two decimal places)
3	uint16_t	temp_max_x	X coordinate of the max temperature in the full image
4	uint16_t	temp_max_y	Y coordinate of the max temperature in the full image
5	uint16_t	temp_min_x	X coordinate of the min temperature in the full image
6	uint16_t	temp_min_x	Y coordinate of the min temperature in the full image

**Mark:**

This command is only available for ZT30 and ZT6 at this moment.

## Request the Thermal Color Palette

CMD_ID:0x1A-----Request the Thermal Color Palette			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
	uint8_t	pseudo_color	11 thermal colors are available in total: 0: White_Hot 1: Reserved 2: Sepia 3: Ironbow 4: Rainbow 5: Night 6: Aurora 7: Red_Hot 8: Jungle 9: Medical 10: Black_Hot 11: Glory_Hot

**Mark:**

This command is only available for ZT30 and ZT6 at this moment.

## Send a Thermal Color to Gimbal Camera

CMD_ID:0x1B-----Send a Thermal Color to Gimbal Camera			
Send data format			
No.	Data Type	Data Name	Description

	uint8_t	pseudo_color	11 thermal colors are available in total: 0: White_Hot 1: Reserved 2: Sepia 3: Ironbow 4: Rainbow 5: Night 6: Aurora 7: Red_Hot 8: Jungle 9: Medical 10: Black_Hot 11: Glory_Hot
ACK data format			
	uint8_t	pseudo_color	11 thermal colors are available in total: 0: White_Hot 1: Reserved 2: Sepia 3: Ironbow 4: Rainbow 5: Night 6: Aurora 7: Red_Hot 8: Jungle 9: Medical 10: Black_Hot 11: Glory_Hot

Mark:

This command is only available for ZT30 and ZT6 at this moment.

### Send Thermal RAW Data Command to Gimbal

CMD_ID:0x34----- Send Thermal RAW Data Command to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	mode	0: 30 fps 1: 25 fps and output temperature frame
ACK data format			
1	uint8_t	mode	0: 30 fps 1: 25 fps and output temperature frame

Mark:

This command is only available for ZT30 and ZT6 at this moment.

## Request Temperature from the Thermal Imaging Camera Once

CMD_ID:0x35----- Request Temperature from the Thermal Imaging Camera Once			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint8_t	ack	1: Success

Mark:

This command is only available for ZT30 and ZT6 at this moment.

## Request Thermal Gain

CMD_ID:0x37----- Request Thermal Gain			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint8_t	lr_gain	0: Low gain 1: High gain

Mark:

This command is only available for ZT30 and ZT6 at this moment.

## Send Thermal Gain to Gimbal

CMD_ID:0x38----- Send Thermal Gain to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	lr_gain	0: Low gain 1: High gain
ACK data format			
1	uint8_t	lr_gain	0: Low gain 1: High gain

Mark:

This command is only available for ZT30 and ZT6 at this moment.

## Request Thermal Calibration

CMD_ID:0x39----- Request Thermal Calibration			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint8_t	EnvCorrect	0: ON 1: OFF

Mark:

This command is only available for ZT30 and ZT6 at this moment.

### Send Thermal Calibration to Gimbal

CMD_ID:0x3A----- Send Thermal Calibration to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	EnvCorrect	0: ON 1: OFF
ACK data format			
1	uint8_t	EnvCorrect	0: ON 1: OFF

Mark:

This command is only available for ZT30 and ZT6 at this moment.

### Request Thermal Calibration Parameters

CMD_ID:0x3B----- Request Thermal Calibration Parameters			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint16_t	Dist	Distance (m)
2	uint16_t	Ems	Target emission rate (%)
3	uint16_t	Hum	Humidity (%)
4	uint16_t	Ta	Atmospheric Temperature (°C)
5	uint16_t	Tu	Reflection Temperature (°C)

Mark:

1. All parameters of this protocol are divided by 100 and retained to two decimal places.
2. This command is only available for ZT30 and ZT6 at this moment.

### Send Thermal Calibration Parameters to Gimbal

CMD_ID:0x3C----- Send Thermal Calibration Parameters to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
1	uint16_t	Dist	Distance (m)
2	uint16_t	Ems	Target emission rate (%)
3	uint16_t	Hum	Humidity (%)
4	uint16_t	Ta	Atmospheric Temperature (°C)
5	uint16_t	Tu	Reflection Temperature (°C)
ACK data format			
1	uint8_t	ack	1: Success

Mark:

1. All parameters of this protocol are divided by 100 and retained to two decimal places.
2. This command is only available for ZT30 and ZT6 at this moment.

### Request Range Value from the Laser Rangefinder

CMD_ID:0x15-----Request Range Value from the Laser Rangefinder			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint16_t	info_type	Range from Laser Rangefinder low byte in the front, high byte in the back Minimum value is 50 Data unit is dm

Mark:

This command is only available for ZT30 and at this moment.

### Request the Latitude and Longitude of the Laser Rangefinder's Target

CMD_ID:0x17----- Request the Latitude and Longitude of the Laser Rangefinder's Target			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	int32_t	lon_degE7	[degE7] Longitude (WGS84, EGM96 spheroid)
2	int32_t	lat_degE7	[degE7] Latitude (WGS84, EGM96 spheroid)

Mark:

This command is only available for ZT30 at this moment.

### Request Laser Rangefinder Status

CMD_ID:0x31----- Request Laser Rangefinder Status			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint8_t	laser_state	1: ON 0: OFF

Mark:

This command is only available for ZT30 at this moment.

## Send Lase Rangefinder Status to Gimbal

CMD_ID:0x32----- Send Lase Rangefinder Status to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	laser_state	1: ON 0: OFF
ACK data format			
1	uint8_t	sta	1: Success 0: Fail

Mark:

This command is only available for ZT30 at this moment.

## Send Flight Controller Attitude Data to Gimbal UART Port

CMD_ID:0x22----- Send Flight Controller Attitude Data to Gimbal UART Port			
Send data format			
No.	Data Type	Data Name	Description
1	float	roll	[rad] Roll angle (-pi..+pi)
2	float	pitch	[rad] Pitch angle (-pi/2..+pi/2)
3	float	yaw	[rad] Yaw angle (-pi..+pi)
4	float	rollspeed	[rad/s] Roll angular speed
5	float	pitchspeed	[rad/s] Pitch angular speed
6	float	yawspeed	[rad/s] Yaw angular speed
ACK data format			

## Request the Flight Controller to Send Data Stream to Gimbal

CMD_ID:0x24----- Request the Flight Controller to Send Data Stream to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	data_type	1: Attitude data 2: RC channel data ( <b>not ready yet</b> )
2	uint8_t	data_freq	Outputting Frequency 0: OFF 1: 2 Hz 2: 4 Hz 3: 5 Hz 4: 10 Hz 5: 20 Hz 6: 50 Hz 7: 100 Hz
ACK data format			
1	uint8_t	data_type	1: Attitude data 2: RC channel data

## Send Flight Controller GPS Data to Gimbal



CMD_ID:0x3E----- Send Flight Controller GPS Data to Gimbal			
Send data format			
No.	Data Type	Data Name	Description
1	uint32_t	time_boot_ms	[ms] time since boot
2	int32_t	lat	[degE7] Latitude
3	int32_t	lon	[degE7] Longitude
4	int32_t	alt	[cm] Altitude (MSL)
5	int32_t	alt_ellipsoid	[cm] Altitude (above WGS84, EGM96 ellipsoid). Positive for up.
6	float	vn	[m/s] X Speed
7	float	ve	[m/s] Y Speed
8	float	vd	[m/s] Z Speed
ACK data format			

### Request the Gimbal to Send Data Stream

CMD_ID:0x25----- Request the Gimbal to Send Data Stream			
Send data format			
No.	Data Type	Data Name	Description
1	uint8_t	data_type	1: Attitude data 2: Laser rangefinder data ( <b>available in ZT30 only</b> )
2	uint8_t	data_freq	Outputting Frequency 0: OFF 1: 2 Hz 2: 4 Hz 3: 5 Hz 4: 10 Hz 5: 20 Hz 6: 50 Hz 7: 100 Hz
ACK data format			
1	uint8_t	data_type	1: Attitude data 2: Laser rangefinder data

Mark:

The frequency of sending laser rangefinder data cannot be configured at this moment. If the frequency is not 0, it sends data.

### Set UTC Time

CMD_ID:0x30----- Set UTC Time			
Send data format			
No.	Data Type	Data Name	Description
1	uint64_t	Timestamp	UNIX epoch time(us)
ACK data format			
1	int8_t	ack	1: Success 0: Time format error

### Format SD Card

CMD_ID:0x48----- Format SD Card			
Send data format			
No.	Data Type	Data Name	Description
ACK data format			
1	uint8_t	format_sta	0: Fail 1: Success

### 3.5.3 SIYI Gimbal Camera SDK Communication Interface

#### TTL Serial Port

- Baud rate: 115200
- Data position: 8 digits. Stop position: 1 digit. No check.

#### UDP

- IP: 192.168.144.25
- Port Number: 37260

#### TCP

- IP: 192.168.144.25
- Port Number: 37260
- Heartbeat Package Data: 55 66 01 01 00 00 00 00 00 59 8B

### 3.5.4 SIYI Gimbal Camera SDK Communication Code Examples

Request the Gimbal Camera's Working Mode in Present

55 66 01 00 00 00 00 19 5D 57

zoom 1

55 66 01 01 00 00 00 05 01 8d 64

zoom -1

55 66 01 01 00 00 00 05 FF 5c 6a

Absolute Zoom (4.5X)

55 66 01 02 00 10 00 0f 04 05 6b 15

Request the Zoom Camera's Max Zoom Value in Present

55 66 01 00 00 00 00 16 B2 A6

Request the Zoom Camera's Zoom Value in Present

55 66 01 00 00 00 00 18 7C 47

Manual Zoom 1

55 66 01 01 00 00 00 06 01 de 31

Manual Zoom -1

55 66 01 01 00 00 00 06 ff 0f 3f

Take a Picture

55 66 01 01 00 00 00 0c 00 34 ce

Record Video

55 66 01 01 00 00 00 0c 02 76 ee

Gimbal Rotation 100 100

55 66 01 02 00 00 00 07 64 64 3d cf

Center

55 66 01 01 00 00 00 08 01 d1 12

Request Gimbal Camera's Status Information

55 66 01 00 00 00 00 0a 0f 75

Auto Focus

55 66 01 01 00 00 00 04 01 bc 57

Request the Gimbal Camera's Hardware ID

55 66 01 00 00 00 00 02 07 f4

Request the Gimbal Camera's Firmware Version

55 66 01 00 00 00 00 01 64 c4

Lock Mode

55 66 01 01 00 00 00 0c 03 57 fe

Follow Mode

55 66 01 01 00 00 00 0c 04 b0 8e

FPV Mode

55 66 01 01 00 00 00 0c 05 91 9e

Request the Gimbal Camera's Attitude Data

55 66 01 00 00 00 00 0d e8 05

Send Control Angle (-90, 0) (Upwards) to Gimbal Camera

55 66 01 04 00 00 00 0e 00 00 ff a6 3b 11

Send "Enable HDMI Output" Command to Gimbal Camera (Available for ZT6, ZR30, and A8 mini, restart after configuration)

55 66 01 01 00 00 00 0c 06 f2 ae

Send "Enable CVBS Output" Command to Gimbal Camera (Available for ZT6 and A8 mini, restart after configuration)

55 66 01 01 00 00 00 0c 07 d3 be

Send "Disable CVBS / HDMI Output" Command to Gimbal Camera (Available for ZT6, ZR30, and A8 mini, restart after configuration)

55 66 01 01 00 00 00 0c 08 3c 4f

Request Gimbal Camera Codec Specs

55 66 01 01 00 00 00 20 00 BF 8D

Configure Camera Codec Specs – Main Stream to HD Resolution

55 66 01 09 00 00 00 21 01 02 00 05 d0 02 dc 05 00 58 45

Configure Camera Codec Specs – Main Stream to Ultra HD Resolution

55 66 01 09 00 00 00 21 01 02 80 07 38 04 d0 07 00 5a 68

Configure Recording Video Stream Resolution as 2K and H265 Bitrate as 15 Mbps

55 66 01 09 00 00 00 21 00 02 00 0a a0 05 98 3a 00 15 f3

Configure Recording Video Stream Resolution as 4K and H265 Bitrate as 15 Mbps

55 66 01 09 00 00 00 21 00 02 00 0f 70 08 98 3a 00 70 be

Request Gimbal Camera's Image Mode in Present

55 66 01 00 00 00 00 10 74 c6

Send "Image Mode" Command to Gimbal Camera

55 66 01 01 00 00 00 11 01 3a ab

Request the Temperature of a Point in Thermal Image

55 66 01 05 00 00 00 12 00 00 00 01 a8 2f

Request the Thermal Color Palette

55 66 01 00 00 00 00 1A 3e 67

Send the “Thermal Color Palette” Command to the Thermal Camera

55 66 01 01 00 00 00 1B 03 b3 64

Request Range Value from the Rangefinder (Low byte in front, high byte in back, available for ZT30)

55 66 01 00 00 00 00 15 D1 96

### 3.5.5 SDK CRC16 Code

```

const uint16_t crc16_tab[256];
/*****
CRC16 Coding & Decoding  $G(X) = X^{16} + X^{12} + X^5 + 1$ 
*****/
uint16_t CRC16_cal(uint8_t *ptr, uint32_t len, uint16_t crc_init)
{
    uint16_t crc,   oldcrc16;
    uint8_t  temp;
    crc = crc_init;
    while (len--!=0)
    {
        temp=(crc>>8)&0xff;
        oldcrc16=crc16_tab[*ptr^temp];
        crc=(crc<<8)^oldcrc16;
        ptr++;
    }
    //crc=~crc;    //??
    return(crc);
}

uint8_t crc_check_16bites(uint8_t* pbuf, uint32_t len, uint32_t* p_result)
{
    uint16_t crc_result = 0;
    crc_result= CRC16_cal(pbuf,len, 0);
    *p_result = crc_result;

    return 2;
}

```

```

const uint16_t crc16_tab[256]= {0x0,0x1021,0x2042,0x3063,0x4084,0x50a5,0x60c6,0x70e7,
                                0x8108,0x9129,0xa14a,0xb16b,0xc18c,0xd1ad,0xe1ce,0xf1ef,
                                0x1231,0x210,0x3273,0x2252,0x52b5,0x4294,0x72f7,0x62d6,
                                0x9339,0x8318,0xb37b,0xa35a,0xd3bd,0xc39c,0xf3ff,0xe3de,
                                0x2462,0x3443,0x420,0x1401,0x64e6,0x74c7,0x44a4,0x5485,
                                0xa56a,0xb54b,0x8528,0x9509,0xe5ee,0xf5cf,0xc5ac,0xd58d,
                                0x3653,0x2672,0x1611,0x630,0x76d7,0x66f6,0x5695,0x46b4,
                                0xb75b,0xa77a,0x9719,0x8738,0xf7df,0xe7fe,0xd79d,0xc7bc,
                                0x48c4,0x58e5,0x6886,0x78a7,0x840,0x1861,0x2802,0x3823,
                                0xc9cc,0xd9ed,0xe98e,0xf9af,0x8948,0x9969,0xa90a,0xb92b,
                                0x5af5,0x4ad4,0x7ab7,0x6a96,0x1a71,0xa50,0x3a33,0x2a12,
                                0xdbfd,0xcdbc,0xfbbf,0xeb9e,0x9b79,0x8b58,0xbb3b,0xab1a,
                                0x6ca6,0x7c87,0x4ce4,0x5cc5,0x2c22,0x3c03,0xc60,0x1c41,
                                0xedae,0xfd8f,0xcdec,0xddcd,0xad2a,0xbd0b,0x8d68,0x9d49,
                                0x7e97,0x6eb6,0x5ed5,0x4ef4,0x3e13,0x2e32,0x1e51,0xe70,
                                0xff9f,0xefbe,0xdfdd,0xcffc,0xbf1b,0xaf3a,0x9f59,0x8f78,
                                0x9188,0x81a9,0xb1ca,0xa1eb,0xd10c,0xc12d,0xf14e,0xe16f,
                                0x1080,0xa1,0x30c2,0x20e3,0x5004,0x4025,0x7046,0x6067,
                                0x83b9,0x9398,0xa3fb,0xb3da,0xc33d,0xd31c,0xe37f,0xf35e,
                                0x2b1,0x1290,0x22f3,0x32d2,0x4235,0x5214,0x6277,0x7256,
                                0xb5ea,0xa5cb,0x95a8,0x8589,0xf56e,0xe54f,0xd52c,0xc50d,
                                0x34e2,0x24c3,0x14a0,0x481,0x7466,0x6447,0x5424,0x4405,
                                0xa7db,0xb7fa,0x8799,0x97b8,0xe75f,0xf77e,0xc71d,0xd73c,
                                0x26d3,0x36f2,0x691,0x16b0,0x6657,0x7676,0x4615,0x5634,
                                0xd94c,0xc96d,0xf90e,0xe92f,0x99c8,0x89e9,0xb98a,0xa9ab,
                                0x5844,0x4865,0x7806,0x6827,0x18c0,0x8e1,0x3882,0x28a3,
                                0xcb7d,0xdb5c,0xeb3f,0xfb1e,0x8bf9,0x9bd8,0xabbb,0xbb9a,
                                0x4a75,0x5a54,0x6a37,0x7a16,0xaf1,0x1ad0,0x2ab3,0x3a92,
                                0xfd2e,0xed0f,0xdd6c,0xcd4d,0xbdaa,0xad8b,0x9de8,0x8dc9,
                                0x7c26,0x6c07,0x5c64,0x4c45,0x3ca2,0x2c83,0x1ce0,0xcc1,
                                0xef1f,0xff3e,0xcf5d,0xdf7c,0xaf9b,0xbfba,0x8fd9,0x9ff8,
                                0x6e17,0x7e36,0x4e55,0x5e74,0x2e93,0x3eb2,0xed1,0x1ef0
};

```

### 3.5.6 Advanced Guide for SIYI Gimbal SDK Integration

This special guide is to help developers (especially whose development is based

on Linux platform) use SIYI gimbal SDK.

## Mark

Before using the guide, please do read the chapter 3.3.1 to 3.3.5 of the user manual.

This guide is using UDP protocol:

1. Go to chapter 3.3.4 of this manual for SIYI Gimbal Camera SDK Communication Code Examples and fill your required examples to “send\_buff” following the below format in hexadecimal.

```
int sockfd;
int ret, i, recv_len;
struct sockaddr_in send_addr, recv_addr;
unsigned char send_buff[] = {0x55,0x66,0x01,0x01,0x00,0x00,0x00,0x00,0x08,0x01,0xd1,0x12}; //对应功能的帧协议,十六进制数据
unsigned char recv_buf[RECV_BUUF_SIZE] = {0};

/* 创建udp套接字
```

2. Chang the gimbal camera’s server port and IP addresses to what you need. The double quotation marks of the IP addresses should be kept.

```
#define SERVER_PORT    37260           //云台相机（服务端）端口号
#define SERVER_IP      "192.168.1.25" //云台相机（服务端）IP
```

3. Create a socket keyword.

```
/* 创建UDP套接字
   AF_INET:   ipv4地址
   SOCK_DGRAM: UDP 协议
   0:         自动选择类型对应的默认协议
*/
if ((sockfd = socket(AF_INET, SOCK_DGRAM, 0)) < 0) {
    perror("socket");
    exit(1);
}
```

4. Send data to the gimbal camera and do not revise.

```
/* 发送帧数据
   sockfd:          socket套接字文件描述符
   send_buff:       要发送的数据在内存中的首地址
   sizeof(send_buff): 要发送的数据的长度
   0:               发送标志, 一般为0
   (struct sockaddr *)&send_addr: 数据接收端的地址 (包含IP地址和端口号) 的结构体指针
   addr_len:        数据接收端地址结构体的大小
*/
printf("Send HEX data\n");
socklen_t addr_len = sizeof(struct sockaddr_in);
if(sendto(sockfd, send_buff, sizeof(send_buff), 0, (struct sockaddr *)&send_addr, addr_len) < 0)
{
    perror("sendto");
    exit(1);
}
```

5. Receive data responded by the gimbal camera and do not revise.

```

/* 发送帧数据
sockfd:          socket套接字文件描述符
send_buf:       要发送的数据在内存中的首地址
sizeof(send_buf): 要发送的数据的长度
0:             发送标志, 一般为0
(struct sockaddr *)&send_addr: 数据接收端的地址 (包含IP地址和端口号) 的结构体指针
addr_len:      数据接收端地址结构体的大小
*/
printf("Send HEX data\n");
socklen_t addr_len = sizeof(struct sockaddr_in);
if(sendto(sockfd, send_buf, sizeof(send_buf), 0, (struct sockaddr *)&send_addr, addr_len) < 0)
{
    perror("sendto");
    exit(1);
}

```

## 6. Print the received data in hexadecimal and do not revise.

```

// 十六进制形式打印接收到的数据
printf("Received HEX data:");
for (int i = 0; i < recv_len; i++)
{
    printf("%02x ", recv_buf[i]);
}
printf("\n");

```

## 7. Following the above steps, compile and run the SDK and you will see the printed data below, which means data can be sent and received normally. At this moment, please observe if the gimbal camera executes the relevant actions.

```

yang@ubuntu:~/_star$ gcc siyi.c -o siyi
yang@ubuntu:~/_star$ ./siyi
Send HEX data
Received HEX data: 55 66 02 01 00 08 00 08 01 90 4f
yang@ubuntu:~/_star$

```

## Mark

Before using the SDK to communicate with the gimbal camera in UDP protocol, please do make sure that the device and the gimbal camera are in the same gateway, which means that ubuntu can ping the gimbal camera's IP addresses successfully.

If they still didn't communicate, the possible reason is that the Windows firewall is interrupting the sending and receiving of data, then try to disable Windows firewall temporarily.

## Relevant Code Examples

```

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <errno.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <arpa/inet.h>
#include <unistd.h>

#define RECV_BUUF_SIZE    64
#define SERVER_PORT      37260 // Gimbal Camera (Server) Port

```



```
#define SERVER_IP      "192.168.144.25"           // Gimbal Camera (Server) IP Addresses

int main(int argc, char *argv[])
{
    int sockfd;
    int ret, i, recv_len;
    struct sockaddr_in send_addr, recv_addr;
    unsigned char send_buf[] = {0x55,0x66,0x01,0x01,0x00,0x00,0x00,0x08,0x01,0xd1,0x12}; // Frame
    protocol of the relevant functions in hexadecimal
    unsigned char recv_buf[RECV_BUUF_SIZE] = {0};

    /* Create UDP Socket
       AF_INET:    ipv4 addresses
       SOCK_DGRAM: UDP protocol
       0:          automatically choose the default protocol of the relevant type
    */
    if ((sockfd = socket(AF_INET, SOCK_DGRAM, 0)) < 0) {
        perror("socket");
        exit(1);
    }

    /* Set IP addresses and port number of gimbal camera
       sin_family:    ipv4 addresses
       sin_addr.s_addr: IP addresses of gimbal camera
       sin_port:      port of gimbal camera
    */
    memset(&send_addr, 0, sizeof(send_addr));
    send_addr.sin_family = AF_INET;
    send_addr.sin_addr.s_addr = inet_addr(SERVER_IP);
    send_addr.sin_port = htons(SERVER_PORT);

    /* Send frame data
       sockfd:          descriptor of socket
       send_buf:        head address in RAM of the sending data
       sizeof(send_buf): length of sending data
       0:               sending mark, usually it is 0
       (struct sockaddr *)&send_addr: structure pointer of the receiving data addresses
       (including IP addresses and port)
       addr_len:        structure size of the receiving data addresses
    */
    printf("Send HEX data\n");
    socklen_t addr_len = sizeof(struct sockaddr_in);
    if(sendto(sockfd, send_buf, sizeof(send_buf), 0, (struct sockaddr *)&send_addr, addr_len) < 0)
    {
```

```

    perror("sendto");
    exit(1);
}

/* Receive the responding data from gimbal camera
sockfd:                descriptor of "sockfd" socket
recv_buf:              head address in RAM of the responding data
RECV_BUUF_SIZE:       size of the buffer, which is the length of the max data to
receive
0:                    receiving mark, usually it is 0
(struct sockaddr *)&recv_addr:  the target structure will be filled with addresses (including
IP addresses and port) from the data sender
&addr_len:            the target storage position, the structure size of
"src_addr" and "addrlen" should be filled before calling, the actual size of the sender will be filled after calling

*/
recv_len = recvfrom(sockfd, recv_buf, RECV_BUUF_SIZE, 0, (struct sockaddr *)&recv_addr,
&addr_len);
if (recv_len < 0) {
    perror("recvfrom");
    exit(1);
}

// print the received data in hexadecimal
printf("Received HEX data: ");
for (int i = 0; i < recv_len; i++)
{
    printf("%02x ", recv_buf[i]);
}
printf("\n");

// close socket
close(sockfd);

return 0;
}

```

### 3.5.7 Interface Documentation for SIYI Gimbal Camera's Web Server

Videos and images stored in SIYI gimbal camera can be acquired directly from the web server interface.

#### Interface

**baseUrl:** http://192.168.144.25:82//cgi-bin/media.cgi

#### A Request File Directory

The below interface is to request the directory of the file format for an easy overview.

**URL:** /api/v1/getdirectories

**Method:** GET

#### Request Data

Data Name	Type	Description
media_type	int	0: Images 1: Videos

#### Response Data

The format of the response data is below:

```
{
  "code": 200, // Status code.
  "data": {}, // Content of the data.
  "success": true, // If the request is successful.
  "message": "" // Error message if the request is failed.
}
```

The definition of data is below:

Data Name	Type	Description
media_type	int	0: Images 1: Videos
directories	[ { "name": "aa",	File directory

	<pre>"path": "/yyy/aa" }, { "name": "bb", "path": "/yyy/bb" }, ]</pre>	
--	--	--

### Request Example

Request the number of all the images:

```
{
  "media_type": 0
}
```

### Successful Response

**Condition:** Request data is legal.

**Status Code:** 200 OK

**Response Example:**

File directory after response:

```
{
  "code": 200,
  "data": {
    "media_type": 0,
    "directories": [
      {
        "name": "aa",
        "path": "photo/aa"
      },
      {
        "name": "bb",
        "path": "photo/bb"
      }
    ]
  }
  "success": true
}
```

### Error Response

**Condition:** Request data is illegal. Eg: File type is illegal.

**Status Code:** 400 BAD REQUEST

**Response Example:**

```
{
  "code": 400,
  "message": "Invalid media type",
  "success": false
}
```

## B Request the File Numbers under the File Directory

The below interface is for authorized users to request the file numbers under the target directory.

**URL:** /api/v1/getmediacount

**Method:** GET

### Request Data

Data Name	Type	Description
media_type	int	0: Images 1: Videos
path	String	If the string is empty, return to request the total file number in present. If the string is not empty, return to the number of the target directory.

### Response Data

The format of the response data is below:

```
{
  "code": 200, // Status code.
  "data": {}, // Content of the data.
  "success": true, // If the request is successful.
  "message": "" // Error message if the request is failed.
}
```

The definition of data is below:

Data Name	Type	Description
media_type	int	0: Images 1: Videos
count	int	File number
path	int	Path of file directory

### Request Example

Request the number of all the images:

```
{
  "media_type": 0,
  "path": ""
}
```

Request the image numbers under the target path:

```
{
  "media_type": 0,
  "path": "/photo/aa"
}
```

### Successful Response

**Condition:** Request data is legal and user identity verification passed.

**Status Code:** 200 OK

#### Response Example:

File numbers which return to 'photo/aa' after response:

```
{
  "code": 200,
  "data": {
    "media_type": 0,
    "count": 20,
    "path": "/photo/aa"
  },
  "success": true
}
```

### Error Response

**Condition:** Request data is illegal. Eg: File type is illegal. File path does not exist.

**Status Code:** 400 BAD REQUEST

#### Response Example:

```
{
  "code": 400,
  "message": "Invalid media type",
  "success": false
}
```

### C Request File List

The below interface is for authorized users to request the file list.

**URL:** /api/v1/getmedialist

Method: GET

### Request Data

Data Name	Type	Description
media_type	int	0: Images 1: Videos
path	String	Empty String: File list is for all the files of the present type. Non-empty String: File list is for the files under the target path.
start	int	Start index of the file list
count	int	Number of the file list. If "start" plus "count" is more than the number of the file list, return to the end of the file list from "start".

### Response Data

The format of the response data is below:

```
{
  "code": 200, // Status code.
  "data": {}, // Content of data.
  "success": true, // If the request is successful.
  "message": "" // Error message if the request is failed.
}
```

The definition of data is below:

Data Name	Type	Description
media_type	int	0: Images 1: Videos
path	String	The requested path.
list	[ { "name": "aa.jpg", "url": "http://xxx/yyy/aa.jpg" }, { "name": "bb.jpg", "url": "http://xxx/yyy/bb.jpg" }, ]	File list.

## Request Example

Request the image list from “photo/20230630” directory:

```
{
  "media_type": 0,
  "path": "photo/20230630",
  "start": 0,
  "count": 10
}
```

## Successful Response

**Condition:** Request data is legal and user identity verification passed.

**Status Code:** 200 OK

### Response Example:

Return to the image list under “photo/20230630” directory after response:

```
{
  "code": 200,
  "data": {
    "media_type": 0,
    "path": "photo/20230630",
    "list": [
      {
        "name": "aa.jpg",
        "url": "http://xxx/yy/aa.jpg"
      },
      {
        "name": "bb.jpg",
        "url": "http://xxx/yy/bb.jpg"
      },
      ...
    ],
  },
  "success": true
}
```

## Error Response

**Condition:** Request data is illegal. Eg: File type is illegal. File path does not exist. Start index exceed the max value. Etc.

**Status Code:** 400 BAD REQUEST

### Response Example:


```
{
```



```
"code": 400,  
"message": "path not exist",  
"success": false  
}
```

## 3.6 Control SIYI Gimbal Camera by the ArduPilot Driver through UART and Integrate Flight Controller Attitude Data

Gimbal camera's UART port connects to ArduPilot flight controller's UART port directly to communicate with the flight controller and to control gimbal rotation, gimbal functions, and camera functions.

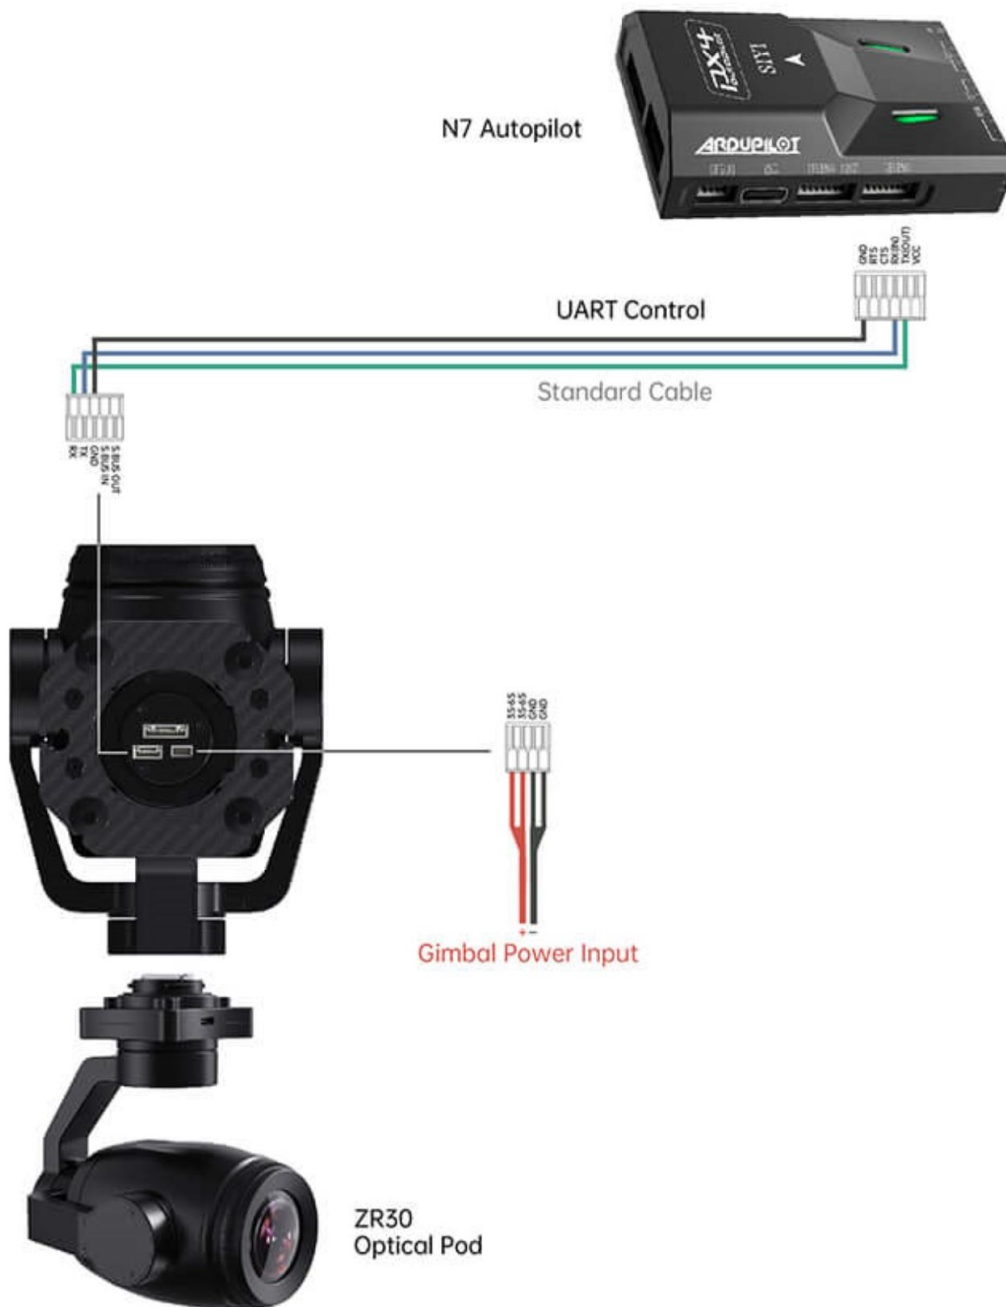

## Preparation

It is necessary to prepare the tools, firmware, and software below before controlling gimbal camera in this way.

- ArduPilot Flight Controller (v4.4.4 and above firmware)
- SIYI Optical Pod (Gimbal Camera)

### Mark

Above products can be purchased from SIYI directly or from SIYI authorized dealers.

- SIYI Gimbal to PX4 / Ardupilot Flight Controller UART Cable

### Mark

Above tools come with product package.

- Mission Planner (Windows) Software

## Steps

1. Power SIYI gimbal camera and ArduPilot flight controller.
2. Connect gimbal camera's UART port to ArduPilot flight controller's UART port and make sure they are communicating with each other.
3. Run ground station and set the following parameters.

## Gimbal Control

The params below assume the autopilot's telem2 port is used and the Camera1 control instance.

- SERIAL2\_PROTOCOL to 8 ("SToRM32 Gimbal Serial")
- SERIAL2\_BAUD to "115" for 115200 bps
- MNT1\_TYPE to "8" ("SIYI") and reboot the ardupilot
- MNT1\_PITCH\_MIN to -90
- MNT1\_PITCH\_MAX to 25
- MNT1\_YAW\_MIN to -80
- MNT1\_YAW\_MAX to 80
- MNT1\_RC\_RATE to 90 (deg/s) to control speed of gimbal when using RC targetting
- CAM1\_TYPE to 4 (Mount / SIYI) to allow control of the camera.
- RC6\_OPTION = 213 ("Mount Pitch") to control the gimbal's pitch angle with RC channel 6
- RC7\_OPTION = 214 ("Mount Yaw") to control the gimbal's yaw angle with RC channel 7
- RC8\_OPTION = 163 ("Mount Lock") to switch between "lock" and "follow" mode with RC channel 8

Optionally these auxiliary functions are also available.


- RC9\_OPTION = 166 ("Camera Record Video") to start/stop recording of video

- RC9\_OPTION = 167 (“Camera Zoom”) to zoom in and out
- RC9\_OPTION = 168 (“Camera Manual Focus”) to adjust focus in and out
- RC9\_OPTION = 169 (“Camera Auto Focus”) to trigger auto focus


### Integrate Flight Controller Attitude Data

The params below assume the autopilot’s telem2 port is used and the Camera1 control instance.

- SERIAL2\_BAUD to “115” for 115200 bps

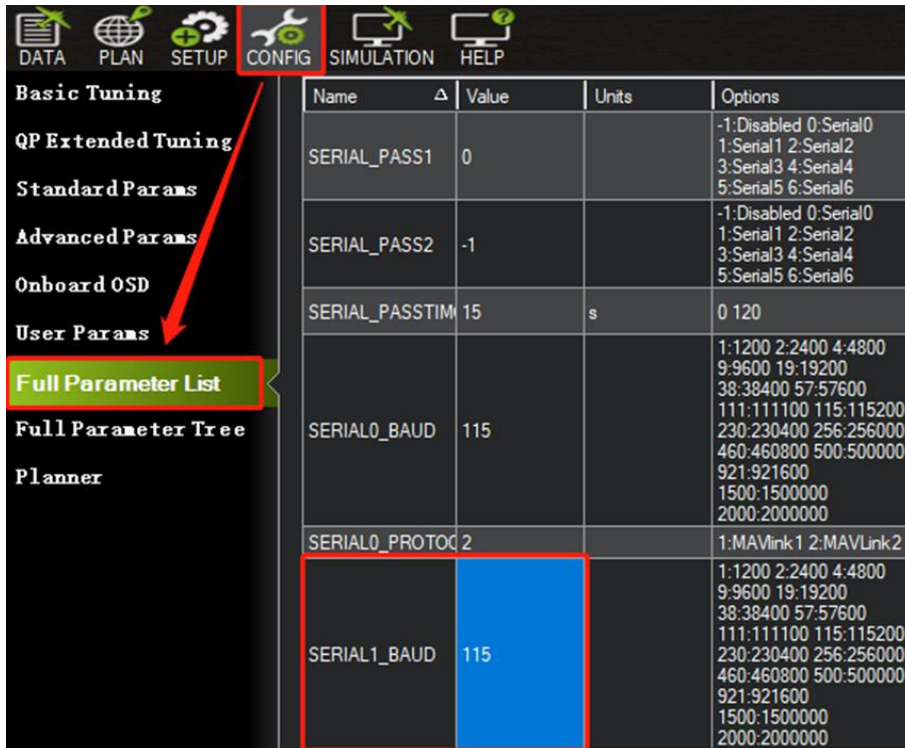

- SR2\_EXTRA1 to “50” to set flight controller attitude angle data sending frequency.

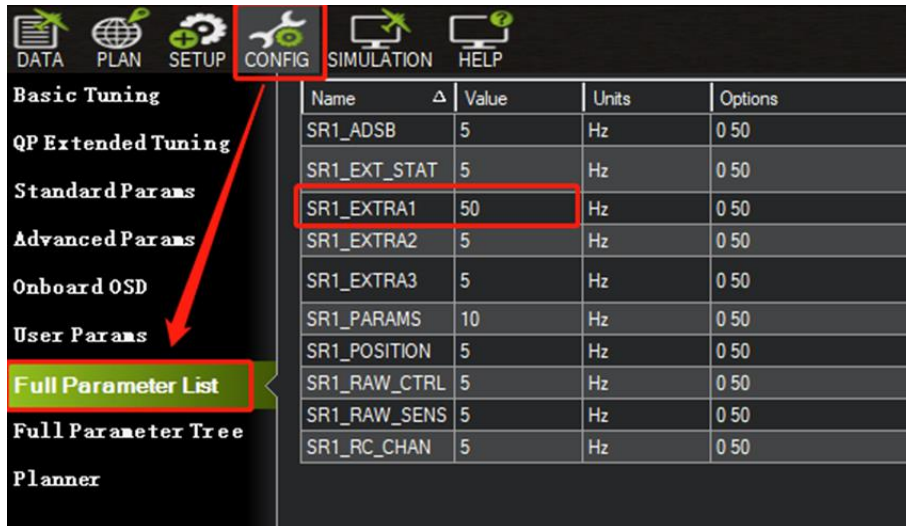

After configuration, it is necessary to “Write Parameters” and reboot the flight controller to take effect.

## Mark


Integrate flight controller attitude data can effectively promote gimbal performance while drone attitude is changing fast.

Welcome to visit ArduPilot official documentation for SIYI gimbal as well.

<https://ardupilot.org/copter/docs/common-siyi-zr10-gimbal.html>

### 3.7 Control SIYI Gimbal Camera by Mavlink Gimbal Protocol through UART and Integrate Flight Controller Attitude Data

Gimbal camera's UART port connects to PX4 flight controller's UART port directly to communicate with the flight controller and to control gimbal rotation, gimbal functions, and camera functions.

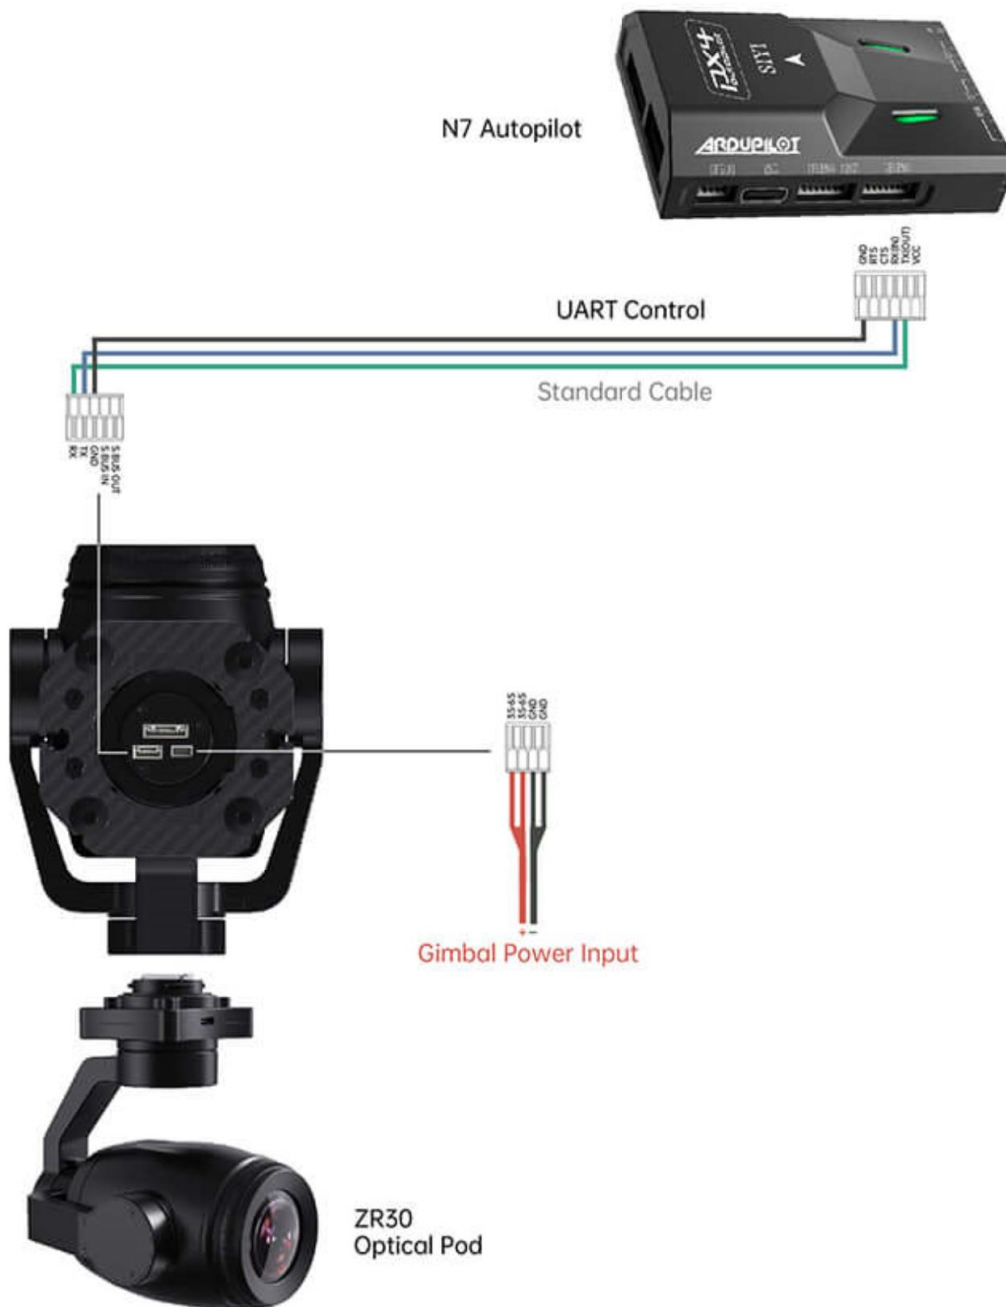

## Preparation

It is necessary to prepare the tools, firmware, and software below before controlling gimbal camera in this way.

- PX4 Flight Controller
- SIYI Optical Pod (Gimbal Camera)

### Mark

Above products can be purchased from SIYI directly or from SIYI authorized dealers.

- SIYI Gimbal to PX4 / Ardupilot Flight Controller UART Cable

### Mark


Above tools come with product package.


- QGroundControl Windows GCS



### 3.8 Necessary Trouble Shooting Steps When Gimbal Attitude Control Is Abnormal

Let's take an example of the problem that gimbal roll axis tilts abnormally.

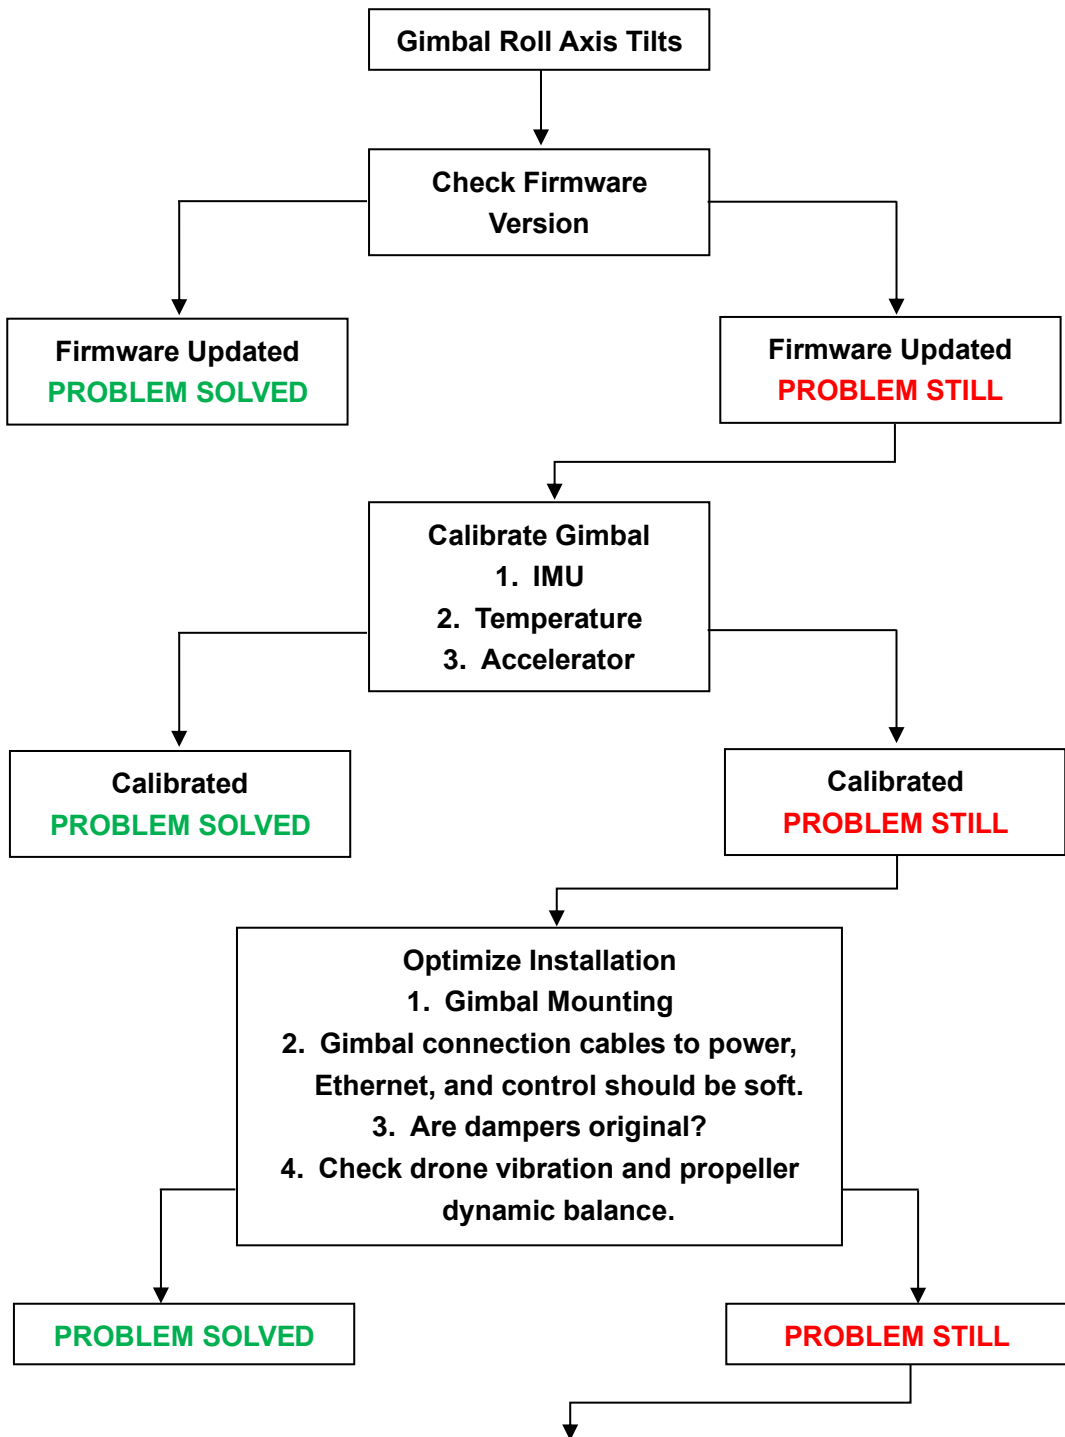

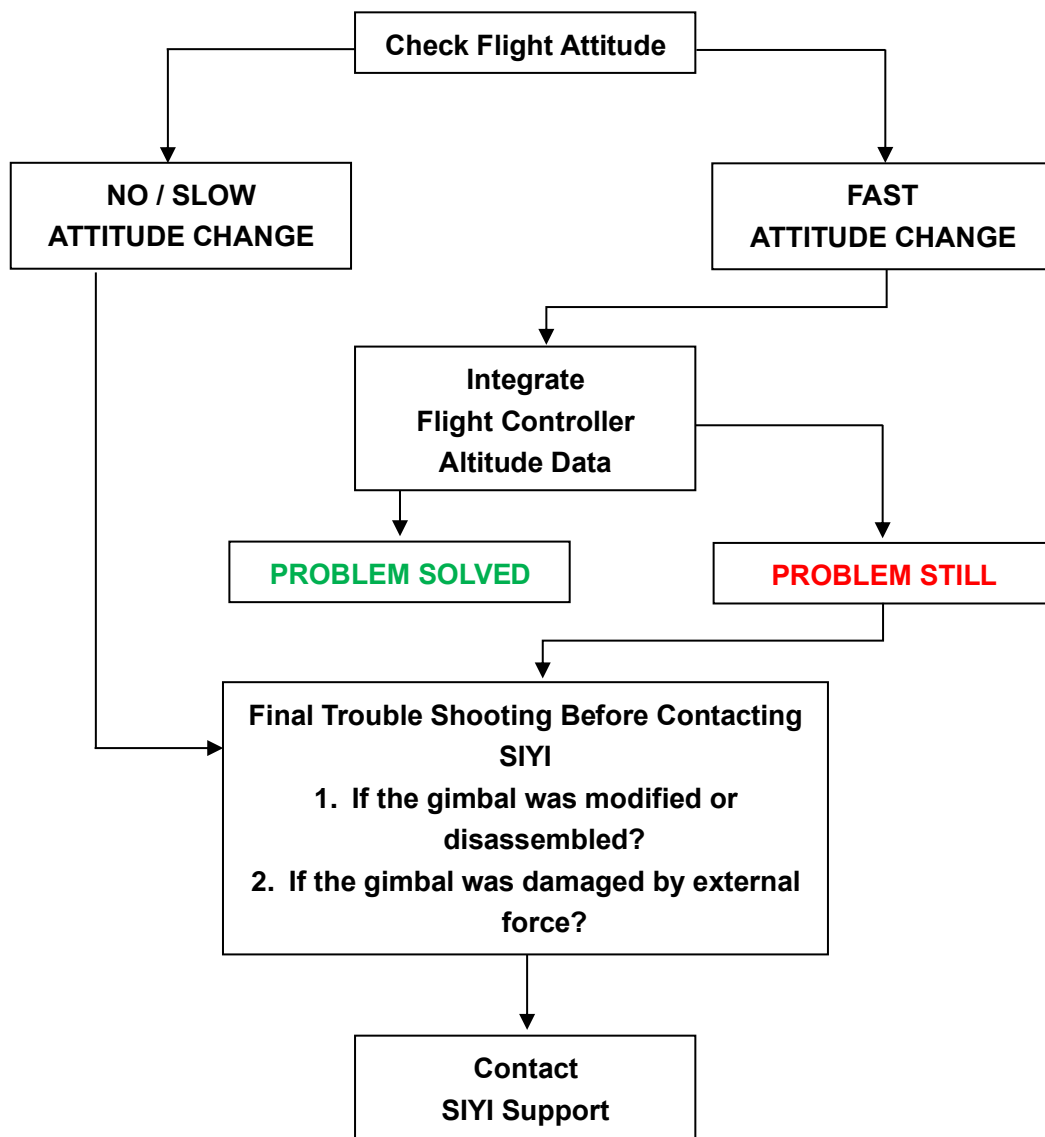

## 4 VIDEO OUTPUT

ZR30 optical pod outputs video through Ethernet and Micro-HDMI port.

### Mark

ZR30's Ethernet port and Micro-HDMI port can output video stream simultaneously.

## 4.1 Output Video to Windows Device Directly through Ethernet

Gimbal camera connects to Windows device directly, then video will be displayed in SIYI QGC Windows software.



SIYI Gimbal RJ45 Cable (New)



SIYI Gimbal RJ45 Cable (Old)

Preparation

It is necessary to prepare the tools, firmware, and software below before outputting video stream in this way.

- SIYI Optical Pod (Gimbal Camera)

### Mark

Above products can be purchased from SIYI directly or from SIYI authorized dealers.

- SIYI Gimbal Ethernet to RJ45 Cable

### Mark

Above tools come with product package.

- SIYI QGC Windows Software

### Mark

Above software can be downloaded from relevant product page on SIYI official website.

## Steps

1. Power gimbal camera.
2. Use SIYI Gimbal Ethernet to RJ45 Cable to connect the gimbal quick release board's Ethernet port to Windows device's RJ45 port. If your computer does not come with RJ45 port, it is suggested to use an RJ45 to USB converter.
3. Modify the computer's Ethernet settings to have the same gateway with SIYI link

and avoid IP addresses conflict.

For example, let's assign "192.168.144.30" for the computer IP addresses.



4. Run SIYI QGC Windows software, go to "Comm Links – Video Settings", and select "RTSP Video Stream" for "Source", then enter the default RTSP addresses of SIYI gimbal camera, video stream will display. Gimbal motion and camera functions can be controlled by mouse in QGroundControl.

## 4.2 Output Video to Third-Party Link through Ethernet

SIYI gimbal camera can output video to any third-party link which provides Ethernet port and is compatible with RTSP video stream.

In this way, it is necessary to prepare a customized video cable for connection between SIYI gimbal camera and the third-party link.



### CAUTION

SIYI gimbal camera Ethernet port's "RX-" pinout should connect to the third-party link Ethernet port's "RX-" pinout, and "RX+" pinout to "RX+" pinout. Do not cross the pinouts, otherwise it will cause damage to the device.

### Steps

1. Power the air unit of the third-party link and bind it with the ground unit.
2. Use the video cable to connect SIYI gimbal camera's Ethernet port and the third-party link's Ethernet port.
3. Open RTSP video player and input SIYI gimbal camera's default RTSP addresses, if connection is successful, video will display normally.

### Mark

SIYI QGC Android app and Windows software support video display from third-party links as well.



## 4.3 Output Video through Micro-HDMI

ZR30 optical pod can output video directly through the Micro-HDMI port.

### Steps

1. Power ZR30 and connect it to PC. Run SIYI Assistant, switch video output mode to “HDMI” under the “Gimbal Config” page.
2. Connect ZR30 to the HDMI monitor.
3. If video shows up, the connection is successful.

## 4.4 Solutions to No Image through Ethernet

If gimbal camera failed to output video or the video cannot be displayed properly, please follow the steps below for trouble shooting.

1. Confirm if the link's ground unit is communicating with the air unit and if the camera is connected to the air unit.
2. Check Camera IP addresses and RTSP addresses.
3. If you are using SIYI FPV app, check the connection status, app version, video stream settings.
4. If you are using SIYI handheld ground stations, check the Ethernet switch in Android system.
5. Please double check if the gimbal camera's IP addresses was modified accidentally.


If video still does not show up, please follow the steps below and make a deep investigation according to the video output mode, the video display device, and the application / software you are using.

### 4.4.1 Video Output to Android Device

1. Input SIYI gimbal's default IP addresses "192.168.144.25" in the "Ping Tools" app and check if the network communication is successful. If the tool responds, then check if the RTSP address in the application / software is correct.



### Successful Network Communication

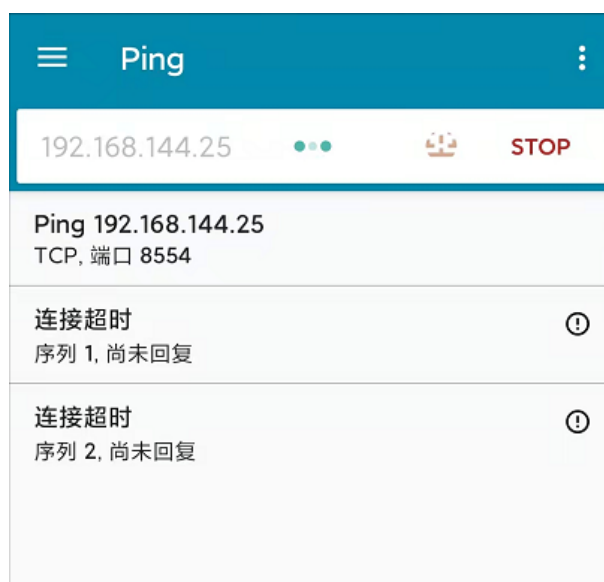


### Network Communication Failed

2. If the network communication is failed, then check the communication between the link's ground unit and the air unit. If the communication is good, then check if the video cable between the camera and the link's air unit is good, and if the voltage input is in normal range.

## 4.4.2 Video Output to Windows Device

1. Use the “Win + R” key combo to wake up the “Run” program and input the command “cmd”.

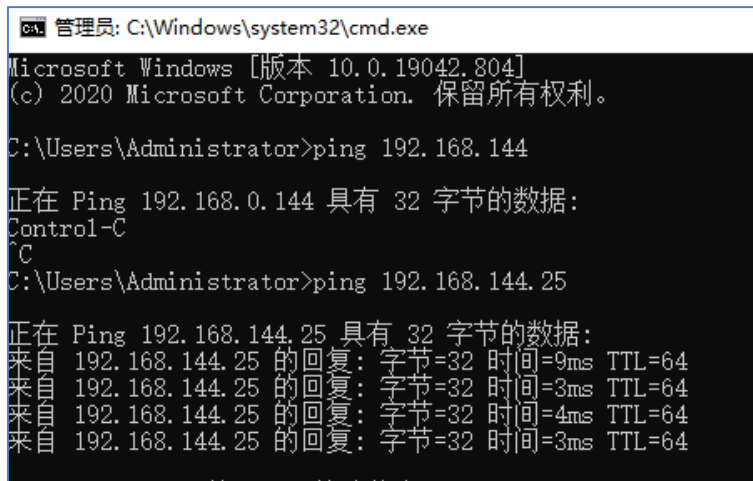


```
管理员: C:\Windows\system32\cmd.exe
Microsoft Windows [版本 10.0.19042.804]
(c) 2020 Microsoft Corporation. 保留所有权利。

C:\Users\Administrator>ping 192.168.144

正在 Ping 192.168.0.144 具有 32 字节的数据:
Control-C
^C
C:\Users\Administrator>ping 192.168.144.25

正在 Ping 192.168.144.25 具有 32 字节的数据:
来自 192.168.144.25 的回复: 字节=32 时间=9ms TTL=64
来自 192.168.144.25 的回复: 字节=32 时间=3ms TTL=64
来自 192.168.144.25 的回复: 字节=32 时间=4ms TTL=64
来自 192.168.144.25 的回复: 字节=32 时间=3ms TTL=64
```

### Successful Network Communication

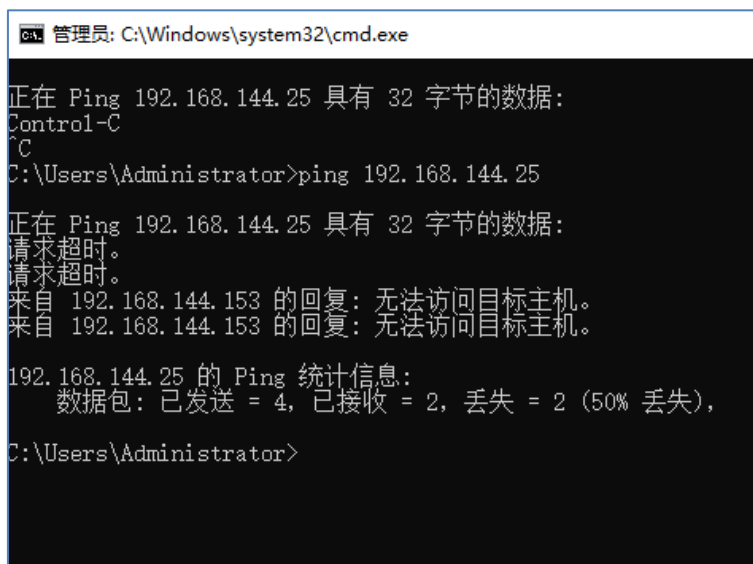

```
管理员: C:\Windows\system32\cmd.exe

正在 Ping 192.168.144.25 具有 32 字节的数据:
Control-C
^C
C:\Users\Administrator>ping 192.168.144.25

正在 Ping 192.168.144.25 具有 32 字节的数据:
请求超时。
请求超时。
来自 192.168.144.153 的回复: 无法访问目标主机。
来自 192.168.144.153 的回复: 无法访问目标主机。

192.168.144.25 的 Ping 统计信息:
    数据包: 已发送 = 4, 已接收 = 2, 丢失 = 2 (50% 丢失),

C:\Users\Administrator>
```

### Network Communication Failed

2. Input SIYI gimbal camera’s default IP addresses “192.168.144.25” and press the “Enter” key to check if the communication is successful. If it is, please check the RTSP addresses in the software or try to switch to another software.

3. If the network didn't connect, then check the communication between the link's ground unit and the air unit. If the communication is successful, then check if the video cable between the camera and the link's air unit is good, and if the voltage input is in normal range.

### **Mark**

If you have done all trouble shooting by following the steps above and still didn't solve the problem, then please contact your dealer, or contact SIYI Support directly.

## 4.5 Common IP Addresses

SIYI Optical Pod / Gimbal Camera's Default IP Addresses: 192.168.144.25

(NEW) SIYI Optical Pod / Gimbal Camera's Default RTSP Addresses:

- Main Stream: rtsp://192.168.144.25:8554/video1
- Sub Stream: rtsp://192.168.144.25:8554/video2

(NEW) SIYI FPV App's Private Video Stream Protocol's Addresses:

- SIYI Camera 1 Main Stream: 192.168.144.25: 37256
- SIYI Camera 1 Sub Stream: 192.168.144.25: 37255
- SIYI Camera 2 Main Stream: 192.168.144.26: 37256
- SIYI Camera 2 Sub Stream: 192.168.144.26: 37255

### Mark

SIYI cameras released after ZT30 (including ZT30 and ZT6) start to use the new addresses.

SIYI cameras released before ZT30 (including ZR30, A2 mini, A8 mini, ZR10, and R1M) are stilling using the old addresses.

## 5 SIYI FPV APP

SIYI FPV is an Android application developed by SIYI to configure many SIYI products for video display, camera stream settings, and communication link status monitoring.

### **Mark**

This chapter is edited based on SIYI FPV App v2.5.15.691.


SIYI FPV App can be downloaded from SIYI official website:

<https://siyi.biz/en/index.php?id=downloads&asd=25>

#### **SIYI FPV App compatible SIYI devices**

- ZT6 Mini Dual-Sensor Optical Pod
- SIYI AI Tracking Module
- ZT30 Four-Sensor Optical Pod
- ZR30 4K AI 180X Hybrid Zoom Optical Pod
- A2 mini Ultra-Wide-Angle FPV Gimbal
- MK32 / MK32E Enterprise Handheld Ground Station
- A8 mini AI Zoom Gimbal Camera
- ZR10 2K 30X Hybrid Zoom Optical Pod
- R1M HD Recording FPV Camera
- Air Unit HDMI Input Converter
- HM30 Full HD Image Transmission System
- MK15 / MK15E Mini Handheld Ground Station

### SIYI FPV App OSD Information Definition

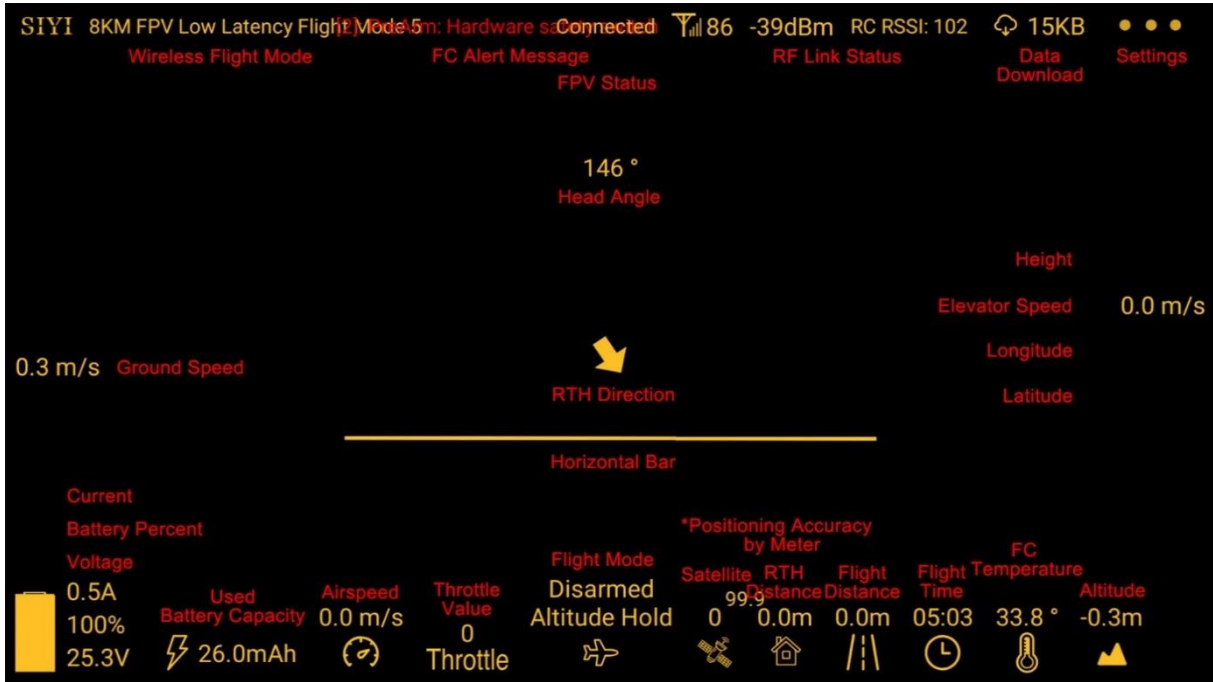


### SIYI FPV Camera Function Icon Definition





## 5.1 Settings

In “Settings” page, you can select camera type with stream type, select or input video stream IP addresses, custom app interface, and switch map type.

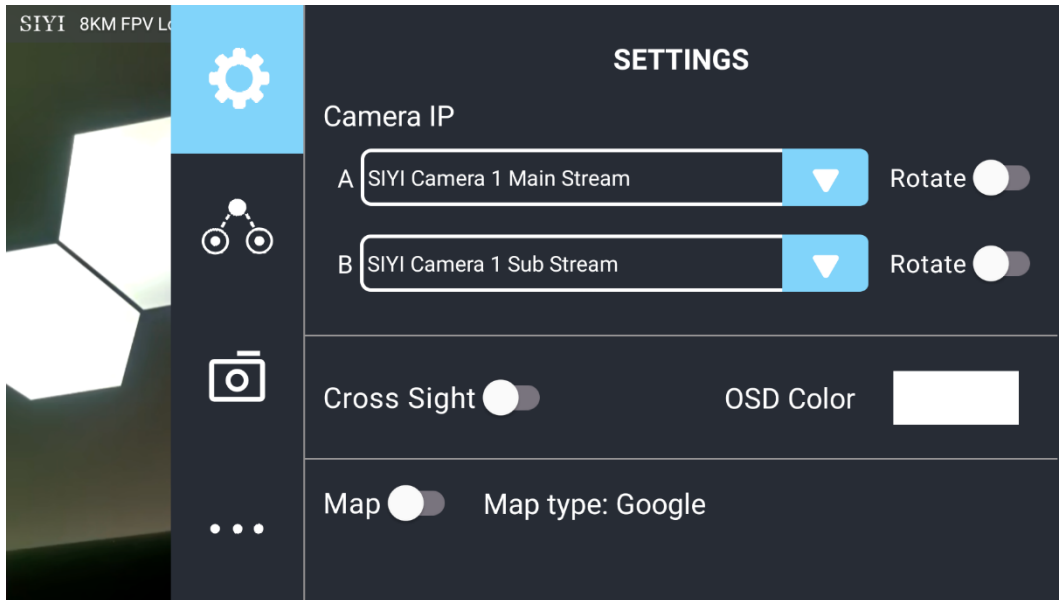

### About Settings

**Camera IP:** Select among SIYI AI Camera, SIYI Camera 1 and SIYI Camera 2, between main stream and sub stream, select or input video stream RTSP addresses, disable image, or rotate the relevant image in 180 degrees.

**Cross Sight:** Enable / disable a cross sight in the center of the image.


**OSD Color:** Custom the color of all OSD information.

**Map:** Enable / disable the map box over the left-bottom corner of the image.

**Map Type:** Switch map type (currently between Baidu and Google).

## 5.2 Link Status

Display the link status directly over the FPV image.

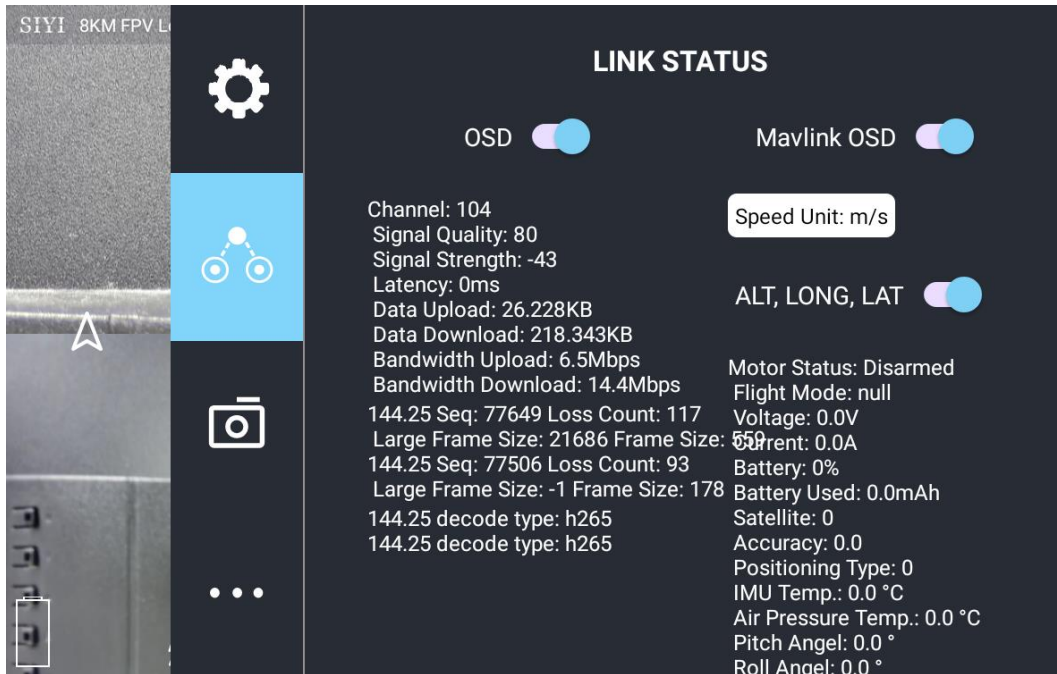

### About Link Status

**OSD:** Enable / disable standard OSD information.


**Mavlink OSD:** Enable / disable Mavlink OSD information.

**Speed Unit:** Switch speed unit between meter per seconds and kilometer per hour.

**Longitude and Latitude:** Enable / disable information.

## 5.3 Gimbal Camera

Configure the basic functions for SIYI gimbal cameras and cameras.

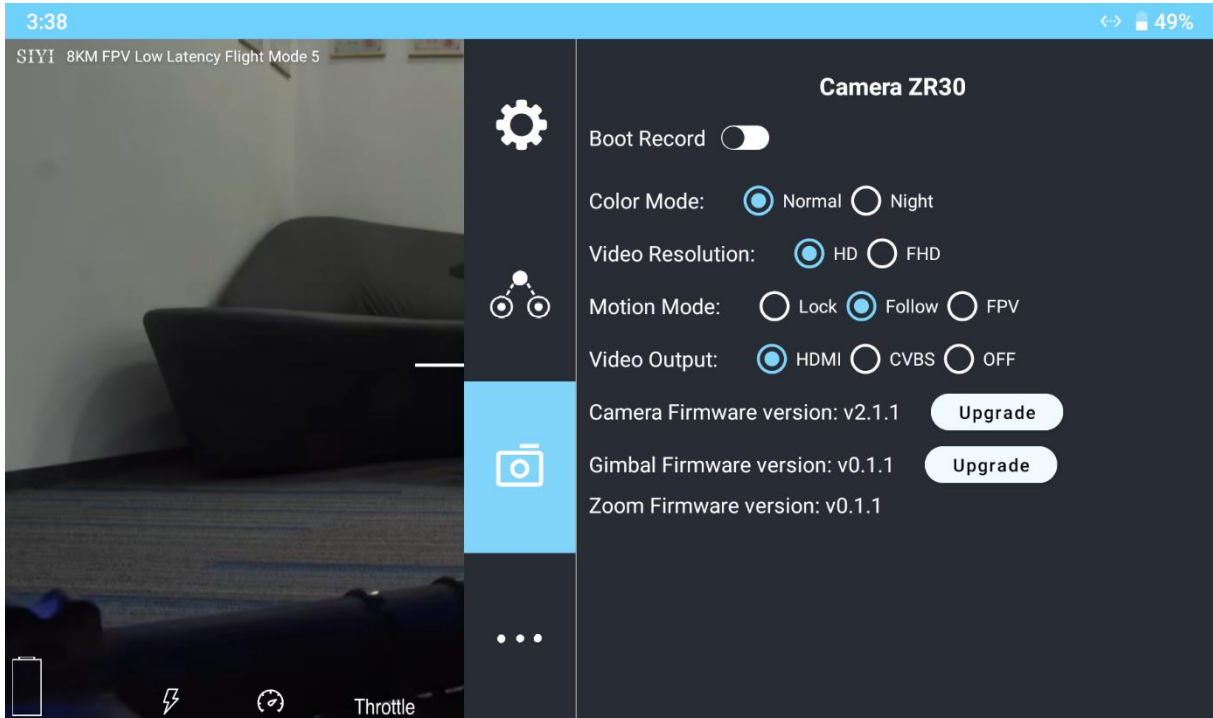

### About Gimbal Camera

**Boot Record:** Enable / disable automatic video recording by SD card as soon as the camera is powered.

**File Manager:** Preview stored images in TF card. Format the TF card.

**Main / Sub Stream:** Configure the main stream and the sub stream separately for their camera source and parameters.

**Image Mode:** Select the video stream's image type and camera source. Single image or split image. Zoom camera, wide angle camera, or thermal imaging camera.

**Stream Resolution:** Decide to switch the output resolution of the current video stream or not according to camera source. Max output resolution is Ultra HD (1080p).

Record Resolution: Decide to switch the recording resolution or not according to camera source. Max record resolution is 4K.

Video Output Port: Switch the video outputting ports.

- HDMI: Through the gimbal camera's Micro-HDMI port.
- CVBS: Through the CVBS pin in the gimbal camera's Ethernet port to output videos in analog signal (**Only available for ZT6 and A8 mini**).
- OFF: Through the gimbal camera's Ethernet only.

Gimbal Working Mode: Switch gimbal working mode among Lock Mode, Follow Mode, and FPV Mode.

- Lock Mode: Horizontally, gimbal does not follow when aircraft rotates.
- Follow Mode: Horizontally, gimbal follows when aircraft rotates.
- FPV Mode: Gimbal rotates simultaneously as aircraft rolls to get FPV view, and output images with enhanced stability.
- AI Tracking: When the gimbal is connected to the AI tracking module and the AI tracking function is activated. It will be AI tracking mode only.


Camera Firmware Version: Display current camera firmware version.

Gimbal Firmware Version: Display current gimbal firmware version.

Zoom Firmware Version: Display current gimbal firmware version. (**Only available for optical zoom cameras**)

## 5.4 About SIYI FPV

Displays the software version of SIYI FPV and common contact information of SIYI Technology.

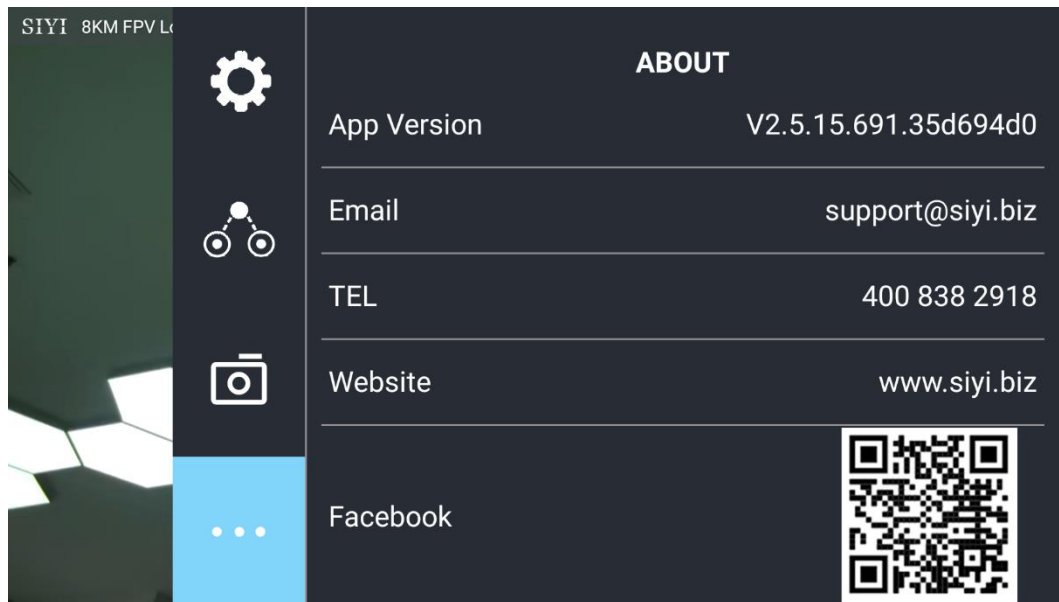

## 5.5 SIYI FPV App Update Log

<b>Date</b>	2024-01-26
<b>Version</b>	2.5.15.695
<b>Updates</b>	1. New: Support AI follow function.

<b>Date</b>	2023-12-18
<b>Version</b>	2.5.15.691
<b>Updates</b>	<ul style="list-style-type: none"> <li>2. Fix: Temperature data still shows on image after switching to optical cameras from thermal camera.</li> <li>3. New (A8 mini): Enable OSD watermark on recording images.</li> <li>4. New: Both video streams can turn on / off recording.</li> <li>5. New (SIYI AI Tracking Module): A switch for flight tracking.</li> <li>6. New (Thermal): A switch for thermal gain.</li> <li>7. New (Thermal): A switch for thermal calibration.</li> <li>8. New (Thermal): A switch for thermal RAW.</li> <li>9. Fix: Camera control interface bug when two different cameras are plugged.</li> </ul>

<b>Date</b>	2023-10-20
<b>Version</b>	2.5.15.679
<b>Updates</b>	<ul style="list-style-type: none"> <li>10. New: AI recognition and tracking function control interface.</li> <li>11. New (ZT30): Zoom &amp; thermal camera simultaneous recording function control interface.</li> <li>12. New: Add the AI tracking module to IP addresses settings.</li> <li>13. Improve: Occasionally video stream does not recover when the link is disconnected under SIYI camera protocol.</li> </ul>

<b>Date</b>	2023-08-24
<b>Version</b>	2.5.15.660
<b>Updates</b>	<ul style="list-style-type: none"> <li>1. New (ZT30): Laser calibration. Display laser ranging target's coordinates.</li> <li>2. New: Support TF format.</li> <li>3. New (ZT30): Thermal color palette.</li> <li>4. New: File manager to preview stored pictures in TF card.</li> <li>5. Improve: New icon indication for missing TF card.</li> </ul>

<b>Date</b>	2023-07-31
<b>Version</b>	2.5.14.644
<b>Updates</b>	<ul style="list-style-type: none"> <li>1. New: Status indication for successfully integrated flight controller attitude data.</li> <li>2. New: Google map is supported.</li> <li>3. Fix: Flight controller location was no accurate. New icons for flight</li> </ul>

	controller location and device location. 4. New: Status indication for missing TF card.
--	--


## 7.6 SIYI FPV SDK Guide

SIYI provides the SIYI FPV SDK to help professional Android application developers to integrate the unique features in SIYI FPV app to their own GCS.

### 7.6.1 Access Method

#### a) Add “fpvlib” into Your Project

Copy the “fpvlib.aar” file to the “libs” folder in your “module” like below:

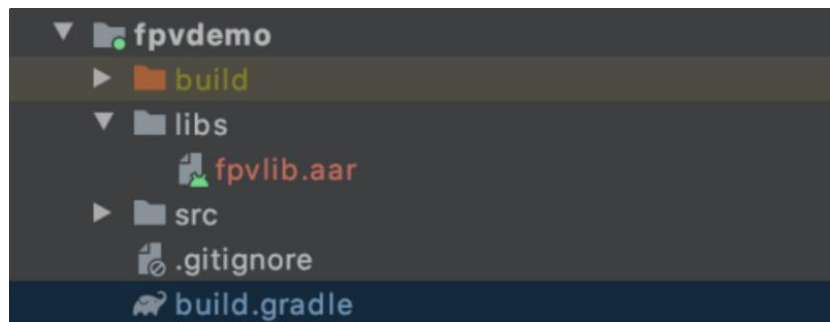

Revise the “build.gradle” file:

```
dependencies {  
    implementation fileTree(dir: 'libs', include: ['*.aar'])  
    implementation 'com.android.support:appcompat-v7:28.0.0'  
    implementation 'com.android.support.constraint:constraint-layout:1.1.3'  
    testImplementation 'junit:junit:4.12'  
    androidTestImplementation 'com.android.support.test:runner:1.0.2'  
    androidTestImplementation 'com.android.support.test.espresso:espresso-core:3.0.2'  
}
```

#### b) Configure “AndroidManifest” File

Add USB reading authorization to the “AndroidManifest” file in your “module” and configure the “intent-filter” file.



```

package="com.siyi.fpvdemo">
<uses-feature android:name="android.hardware.usb.host" />

<application
    android:allowBackup="true"
    android:icon="@mipmap/ic_launcher"
    android:label="fpvdemo"
    android:roundIcon="@mipmap/ic_launcher_round"
    android:supportsRtl="true"
    android:theme="@style/AppTheme">
    <activity android:name=".MainActivity"
        android:launchMode="singleTask"
        android:screenOrientation="landscape">
        <intent-filter>
            <action android:name="android.intent.action.MAIN" />


            <category android:name="android.intent.category.LAUNCHER" />
        </intent-filter>
        <intent-filter>
            <action android:name="android.hardware.usb.action.USB_DEVICE_ATTACHED" />
        </intent-filter>
        <meta-data android:name="android.hardware.usb.action.USB_DEVICE_ATTACHED"
            android:resource="@xml/usb_device_filter" />
        <intent-filter>
            <action android:name="android.hardware.usb.action.USB_ACCESSORY_ATTACHED" />
        </intent-filter>
        <meta-data android:name="android.hardware.usb.action.USB_ACCESSORY_ATTACHED"
            android:resource="@xml/usb_accessory_filter" />
    </activity>

```

### c) Add FPV Display Function into Code

#### Add JNI Library

Like the example below, add JNI library file into the “main” directory, then the “so” library file can be copied from “demo” to your project directory.

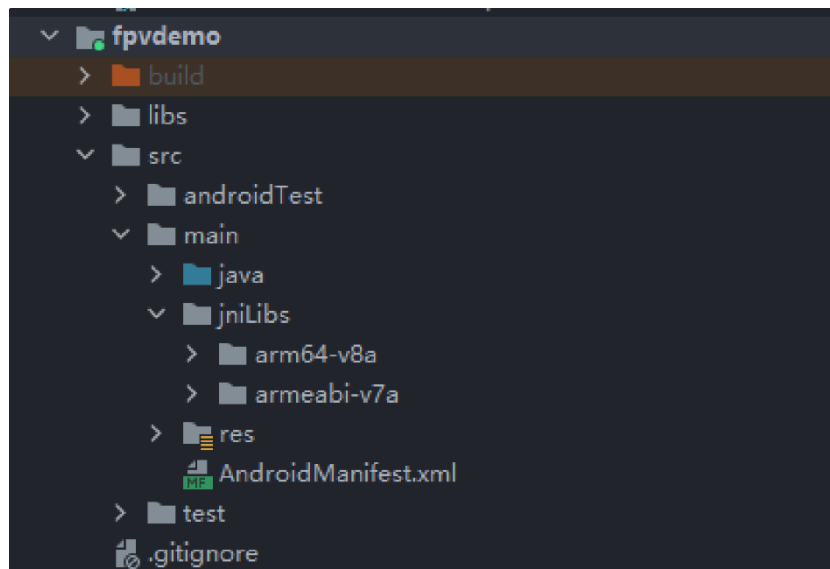

#### Add FPV Video Display to Code

Please pay attention to the below points for your code:

- Firstly, use the static method “getInstances()” of “ConnectionManager” to get the “ConnectionManager” object. Then call the “ConnectionManager.checkConnectWithIntent()” method in the lifecycle method “onCreate()” and “onNewIntent()”.
- Video stream should be displayed through “SurfaceView”. So, we create an “SurfaceView” object and need to call “ConntionManager.notifySurfaceCreate()” and “notifySurfaceDestroy” method from “surfaceCreated()” and “surfaceDestroy()”.

```

mSurfaceView.getHolder().addCallback(new SurfaceHolder.Callback() {
    @Override
    public void surfaceCreated(SurfaceHolder holder) {
        Logcat.d(TAG, "onSurfaceCreated...");
        mConnectionManager.notifySurfaceCreate(holder.getSurface());
    }
    @Override
    public void surfaceChanged(SurfaceHolder holder, int format, int width
, int height) {
    }
    @Override
    public void surfaceDestroyed(SurfaceHolder holder) {
        mConnectionManager.notifySurfaceDestroy(holder.getSurface());
    }
});

```

- **Dual-Channel FPV Display:**

Dual-channel FPV display supports Ethernet connection only. It does not support AOA or USB connection. For dual-channel FPV display, we should configure the IP addresses first, then create two “SurfaceView” for image display. Whether the second video stream is required or not can be judged by the connection type through connection status. You can refer to “demo” for detail.

- When you quit the application, please do not forget to call the “UsbConnectionManager.release()” method.

For more detail, please refer to the codes in “demo”.

## 7.6.2 Interface Instructions

### ConnectionManager

Name	Description
getInstance(Context context)	Single case method for “ConnectionManager”
setWirelessUrl(String url1, String url2)	Set the addresses for video stream.
checkConnectWithIntent(Intent intent)	Initial the connection.
notifySurfaceCreate(Surface surface)	Notify that the first “Surface” is created, the “Surface” is for video display.
notifySurfaceDestroy(Surface surface)	Notify that the first “Surface” is destroyed.

notifySecondSurfaceCreate(Surface surface)	Notify that the second “Surface” is created, the “Surface” is for video display.
notifySecondSurfaceDestroy(Surface surface)	Notify that the second “Surface” is destroyed.
setConnectionListener(ConnectionListener listener)	Set callback for the connection status.
setFrameListeners(FrameListener frameListener, FrameListener secondFrameListener)	Set callback for video stream.
getSDKVersion()	Request SDK version.
release()	Release SDK.

## SettingsConfig

Name	Description
SettingsConfig.getInstance().initConfig(context)	<b>Initialize the settings. This method must be called.</b>
setLogEnable(boolean)	Set if print the log in the sdk. It is suggested to disable print in the “release” version.
setDecodeType(Context context, @IDecodeListener.DecodeType decodeType) int	Set decoding type. In default it is hardware decoding.
setSupportWirelessConnection(Context context, boolean supportWireless)	Set if to support Ethernet connection method.
setRectify(Context context, boolean rectify)	<p>Set if to activate the video stream distortion correction function. The function is disabled in default and is only for A2 mini FPV gimbal at this moment. It works only when the video stream addresses is “RtspConstants.DEFAULT_TCP_VIDEO_URL” “SUB_TCP_VIDEO_URL”.</p> <p>Attention: If distortion correction is activated, when you switch from SIYI camera addresses “RtspConstants.DEFAULT_TCP_VIDEO_URL” “SUB_TCP_VIDEO_URL” to RTSP</p>

	addresses, new surface objects should be imported. One way to do this is to remove "SurfaceView" and add a new "SurfaceView" through "addView", then import the "Surface" object again in "SurfaceHolder.Callback".
getCameraManager()	Request camera control objects. SYSDKCameraManager

**SYSDKCameraManager**

Name	Description
<pre> /**  * Set Camera Resolution  * @param streamType:  * [CameraInfo.STREAM_MAIN],  [CameraInfo.STREAM_SUB].  * @param resolution:  [CAMERA_RESOLUTION_SD] 480p,  [CAMERA_RESOLUTION_HD] 720p,  [CAMERA_RESOLUTION_FHD] 1080p.  * [CAMERA_RESOLUTION_2K] 2K,  [CAMERA_RESOLUTION_4K] 4K,  */ fun setResolution(cameraIndex: Int,     @CameraInfo.StreamType     streamType: Int,     @CameraResolution resolution: Int)                     </pre>	Set camera resolution.

## 7.7 SIYI FPV SDK Update Log

<b>Version</b>	2.5.15
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. Fix the issue that RTSP stream may blurr.</li> <li>2. Add camera control interface.</li> <li>3. Fix some other known issues.</li> </ol> <p>Mark: It is necessary to update the “so” and “aar” file, which can be updated frm the “aar_so” folder.</p>

<b>Version</b>	2.5.14
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. Fix some issues which causes anormal in JNI library (need to update “so” library).</li> <li>2. Fix some other known issues.</li> </ol> <p>Mark: It is necessary to update the “so” and “aar” file, which can be updated frm the “aar_so” folder.</p>

<b>Version</b>	2.5.13
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. Fix the issue that the video stream of some IP65 cameras may blurr.</li> <li>2. Add to support ZT30 camera video stream.</li> </ol> <p>Mark: It is necessary to update the “so” and “aar” file, which can be updated frm the “aar_so” folder.</p>

## 6 SIYI Assistant

SIYI PC Assistant is a Windows software developed by SIYI to configure many SIYI products for configuration, firmware update, and calibration.

### Mark

The manual is edited based on SIYI PC Assistant v1.3.9.

SIYI PC Assistant and the relevant firmware pack can be downloaded from SIYI official website:

<https://siyi.biz/en/index.php?id=downloads&asd=25>

## 6.1 Gimbal / Zoom Firmware Update

SIYI gimbal camera connects to SIYI PC Assistant for gimbal firmware and zoom firmware update.

### Mark

Zoom firmware update is only available for optical zoom gimbal cameras.

Before upgrading, it is necessary to prepare the tools, software, and firmware below.

- SIYI PC Assistant (v1.3.9 or latest version)
- Gimbal Firmware
- Zoom Firmware

### Mark

Above software and firmware can be downloaded from relevant product page on SIYI official website.

- Cable (USB-C to USB-A)




Customers should prepare the above tools.

### **Firmware Upgrade Steps**

1. Install “SIYI PC Assistant” on your Windows device.
2. Use the USB-C to USB-A cable to connect Windows device’s USB-A port to gimbal camera’s USB-C port.
3. Run “SIYI PC Assistant” and switch to “Upload” page to check gimbal camera’s current firmware version.



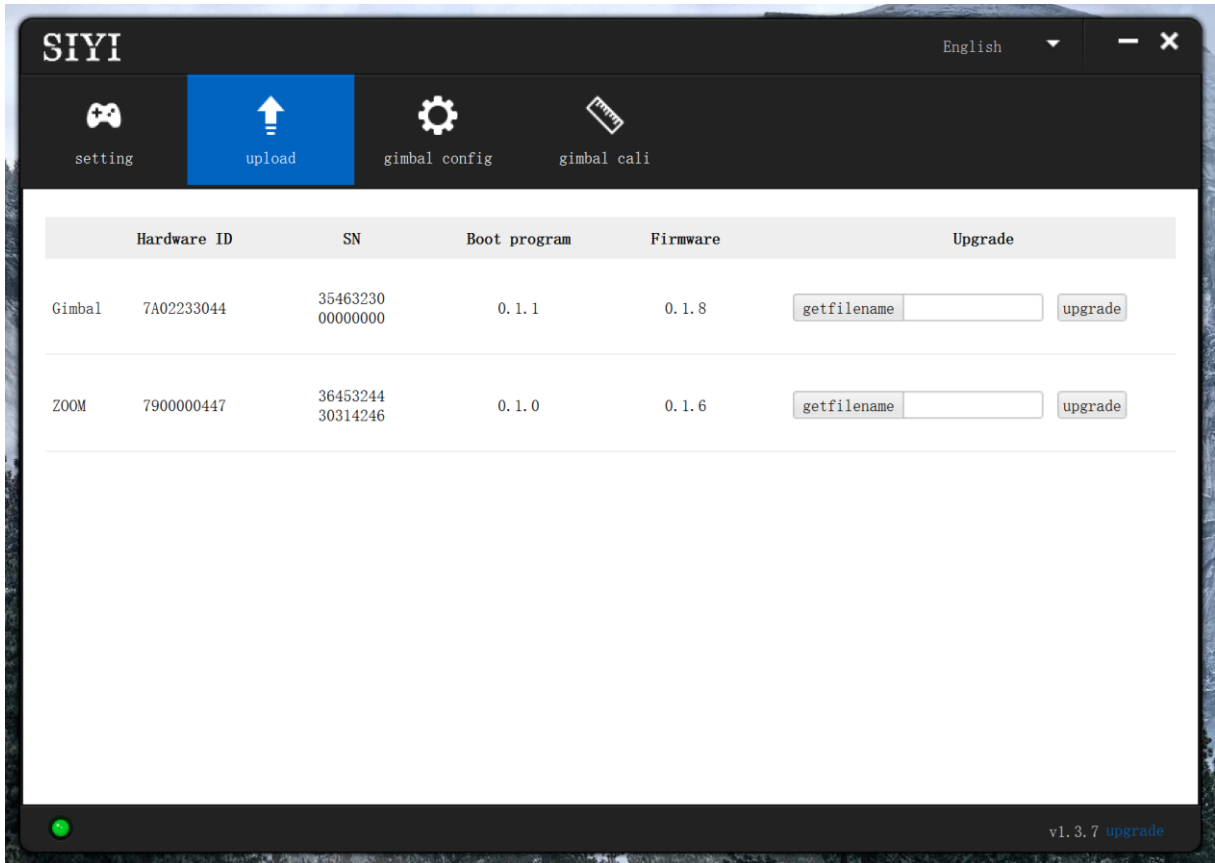

4. If the firmware is not latest, then click the “Select File” button in the “Gimbal” to import the latest firmware. And click “Upgrade” and wait till it is “100%” finished.

## Mark

Before updating any firmware, gimbal camera should be powered.

It is the same process for both gimbal firmware and zoom firmware.

## 6.2 Camera Firmware Update

The camera firmware of SIYI gimbal camera should be upgraded by SD card.

Before upgrading, it is necessary to prepare the tools, software, and firmware below.

- Micro-SD Card

### Mark

Customers should prepare the above tools.

Please make sure that the TF card has been formatted to FAT32 before camera firmware upgrade.

- Camera Firmware

### Mark

Above software and firmware can be downloaded from relevant product page on SIYI official website.

## Firmware Upgrade Steps


1. Save camera firmware's ".bin" file to the SD card's root directory and do not change the file name.

名称	修改日期	类型	大小
SIYI_ZR30_UpgradeSD.bin	2023/10/19 14:36	BIN 文件	19,113 KB

2. Restart gimbal camera and wait for 3 to 5 minutes. Camera firmware will be flashed automatically.
3. Run SIYI FPV app or SIYI PC Assistant software to check if camera firmware is updated successfully.

## 6.3 Gimbal Camera Configuration

SIYI gimbal camera can be connected to SIYI PC Assistant for channel settings and camera settings.

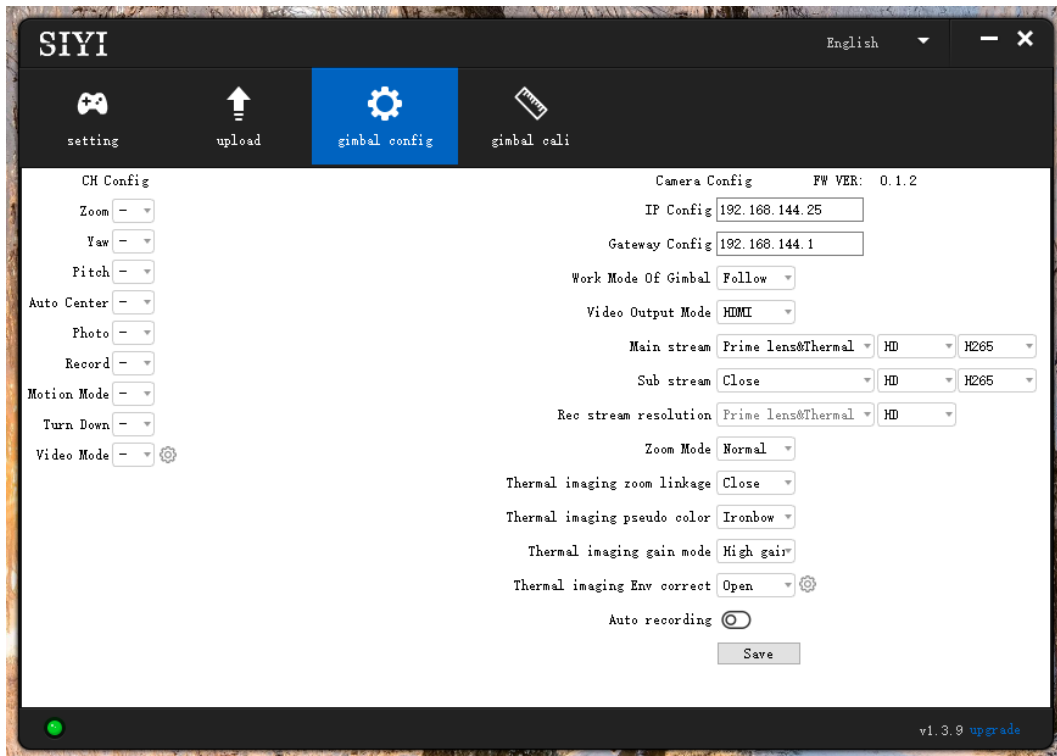



### 6.3.1 Channel Configuration

The “Channel Config” menu under “Gimbal Config” menu can assign the below gimbal camera functions to up to 16 channels and an idle channel (disabled).

#### Gimbal Functions and Description

- Auto Focus: Control zoom camera for automatic focus.

- Zoom: Control camera for optical zoom and digital zoom.
- Manual Focus: Adjust zoom camera focal length for manual focus.
- Yaw: Control gimbal rotation on yaw axis.
- Pitch: Control gimbal rotation on pitch axis.
- Auto Center: Control gimbal to reset to initial position. Coordinates (0, 0).
- Photo: Control camera to take a picture.
- Record: Enable / disable video recording.
- Motion Mode: Switch gimbal working mode (follow mode, lock mode, FPV mode).
- Auto Down: Control gimbal pitch axis to point downward vertically. Coordinates (0, -90).
- Image Mode: Select the video stream's image type and camera source. Single image or split image. Zoom camera, wide angle camera, or thermal imaging camera. Max three switches to be assigned for different image mode.

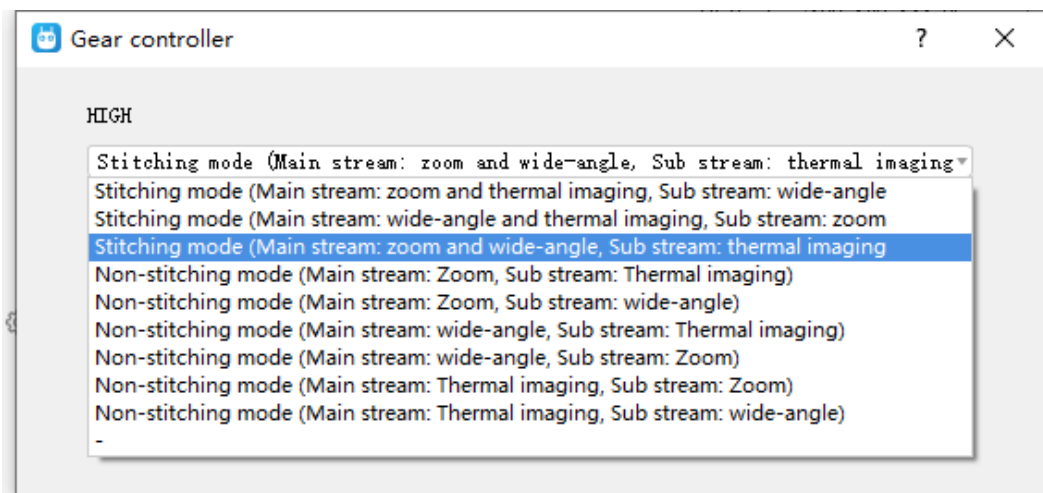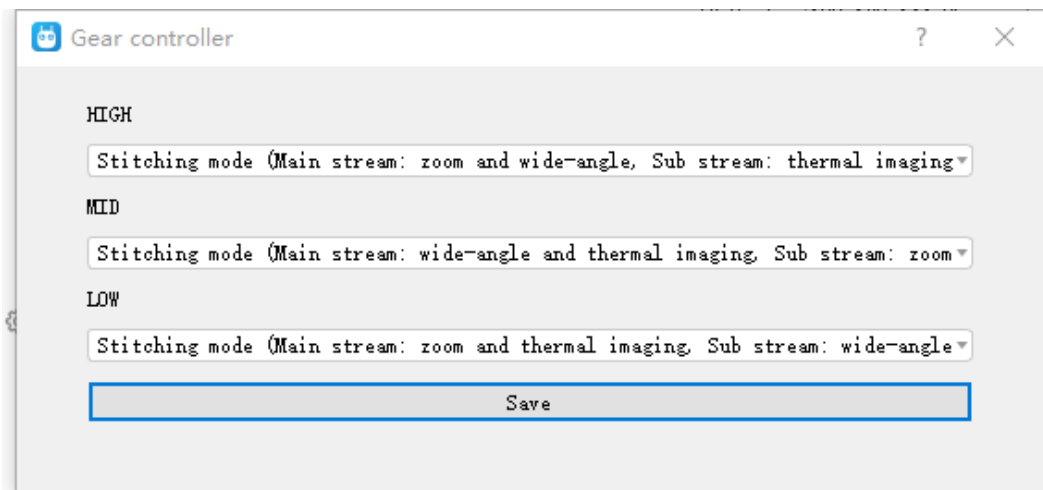

## 6.3.2 Camera Configuration

The “Gimbal Config” menu also supports abundant and core features of SIYI gimbal camera, such as, checking camera firmware version, modifying camera IP addresses, selecting camera source for main / sub stream and video recording, switching camera resolution or zoom mode, enabling / disabling thermal camera’s synchronized zoom, enabling / disabling boot recording.

### About Camera Configuration

- IP Config: Modify camera IP addresses.
- Gateway Config: Modify camera gateway.
- Gimbal Working Mode: Switch gimbal working mode (Follow Mode / Lock Mode / FPV Mode)
- Main Stream: Select camera source and switch output resolution for the main stream.
- Sub Stream: Select camera source and switch output resolution for the sub stream.
- Record Resolution: Select camera source and switch video resolution for recording.
- Zoom Mode: Switch zoom camera’s zoom mode (Normal / Absolute Zoom).
- Boot Record: Enable / disable automatic video recording by TF card as soon as gimbal camera is powered.

### Mark

The camera image source of the record stream is the same with the main stream.

## 6.4 Gimbal Calibration

The “Gimbal Calibration” can help users do IMU calibration, IMU Constant temperature calibration, and accelerator hexahedral calibration.

### 6.4.1 IMU Calibration

IMU calibration can keep the inertial measuring unit’s accuracy and reliability.

IMU calibration [Restore default](#)

Gyroscope(degree/s)


<input type="text" value="-0.0"/>	<input type="text" value="0.0"/>	<input type="text" value="-0.0"/>	<input type="text" value="0.0"/>
X	Y	Z	Mod

Acceleration(g)


<input type="text" value="0.00"/>	<input type="text" value="-0.00"/>	<input type="text" value="-1.00"/>	<input type="text" value="1.00"/>
X	Y	Z	Mod

### Steps


1. Click “Check”, gimbal camera will power off automatically. Meanwhile, please follow the message box and place the gimbal camera on a flat surface and make sure that the IMU is static. Do not touch or vibrate the gimbal camera. Then go for “Start Checking”.

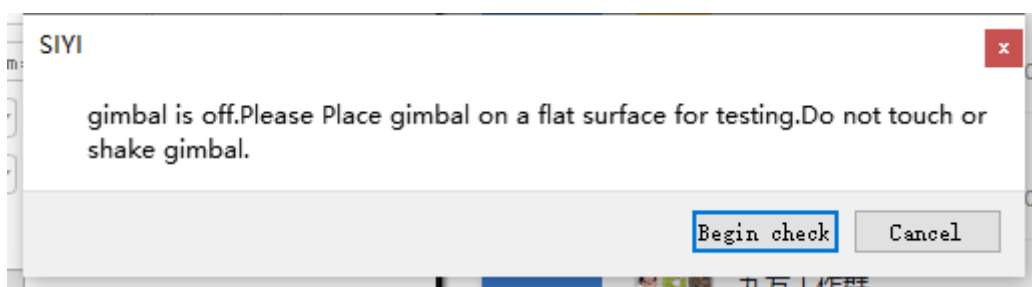

- The PC assistant start to check IMU status automatically to determine if the gimbal should be calibrated.

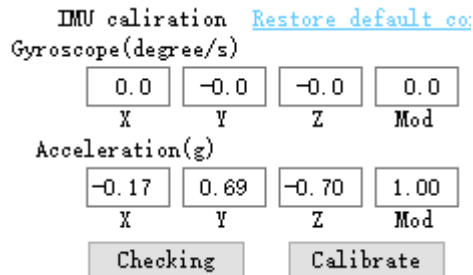


- If IMU is working normally, there will be a message box to indicate “not necessary to calibrate”.
- If IMU is not working normally, there will be a message box to indicate “calibration is necessary”.

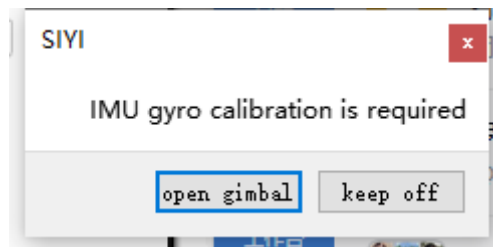


- Click “Start Gimbal” and “Calibrate”.
- The message box will say again “please follow the message box and place the gimbal camera on a flat surface and make sure that the IMU is static. Do not touch or vibrate the gimbal camera”.



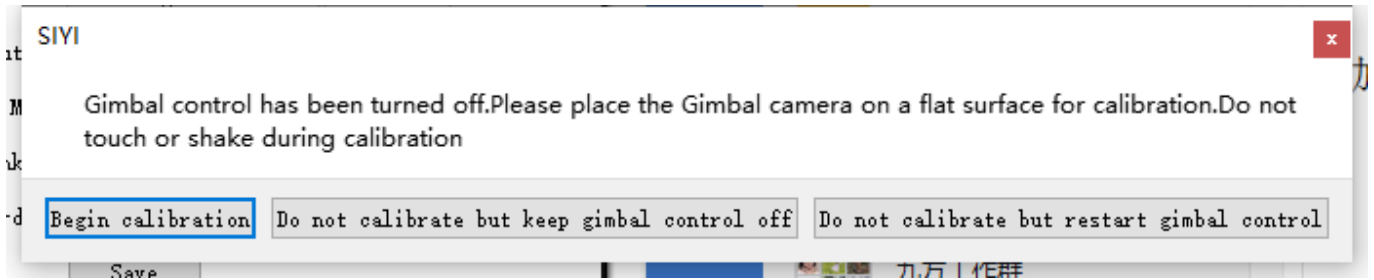


7. IMU calibration menu will display “calibrating”.

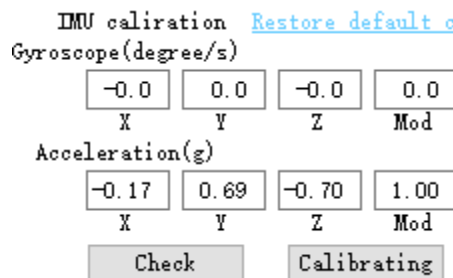

8. After a few seconds, IMU calibration will be finished.

### 6.4.2 IMU Constant Temperature Calibration


Specially designed for using gimbals in scenarios with big difference in temperature to avoid the situation that gimbal behaves abnormally because IMU cannot reach constant temperature normally and fast when the environment temperature is far from IMU constant temperature.



Before calibration, please input the environment temperature of your operating field, the software will start to calculate the target IMU constant temperature so that IMU can reach the temperature fast after powering on gimbal camera. The software is showing IMU temperature in real-time.

### 6.4.3 Accelerator Hexahedral Calibration

Accelerator hexahedral calibration can calibrate the accelerator's sensitivity, zero bias, and inter axis error, etc. During calibration, the gimbal should be placed in all hexahedrons to record accelerator's output value on each orientation and build the error model. Hexahedral calibration can keep the accelerator's accuracy and reliability.

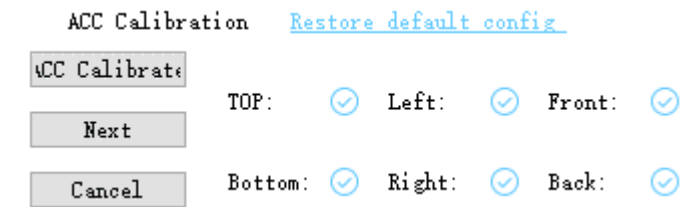

## 6.5 Main Firmware Update Log

<b>Date</b>	2024-01-26
<b>Camera Firmware</b>	0.1.6
<b>Gimbal Firmware</b>	0.2.2
<b>SIYI FPV Windows</b>	Original Version
<b>SIYI FPV Android</b>	2.5.15.695
<b>SIYI PC Assistant</b>	1.4.0
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. New: Support SIYI FPV (Windows) version</li> <li>2. New: Support DCIM standard file system and EXIF information format</li> <li>3. New: SIYI gimbal SDK supports obtaining attitude data from external devices for flight controller integration</li> <li>4. New: SIYI gimbal SDK supports obtaining GPS information and adding it to photo EXIF format</li> <li>5. New: AI following function (only for SIYI AI tracking module and multi-rotor drones)</li> <li>6. New: Adapt to Mavlink protocol control and support the integration of PX4 flight controller attitude data</li> </ol>

<b>Date</b>	2023-10-20
<b>Camera Firmware</b>	0.1.5 svn1144
<b>Gimbal Firmware</b>	0.2.0 svn7078
<b>SIYI FPV</b>	2.5.15.679
<b>SIYI PC Assistant</b>	1.3.8
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. New: Support SIYI AI tracking module.</li> <li>2. New: SIYI gimbal SDK supports configuring camera specs (bit rate, codec format, etc.).</li> </ol>

<b>Date</b>	2023-08-29
<b>Camera Firmware</b>	0.1.4 svn1063
<b>Gimbal</b>	0.1.9 svn6966

<b>Firmware</b>	
<b>Zoom Firmware</b>	0.1.6 svn6792
<b>SIYI FPV</b>	2.5.15.660
<b>SIYI PC Assistant</b>	1.3.7
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. New: Streaming resolution switch.</li> <li>2. New: SIYI gimbal SDK supports TCP protocol.</li> <li>3. New: SIYI gimbal SDK supports point to focus.</li> <li>4. New: Enable OSD in Micro-HDMI video output.</li> <li>5. New: Preview and download pictures through SIYI FPV app and format SD card.</li> <li>6. New: Firmware upgrade through SIYI FPV app.</li> <li>7. New: Support flight controller attitude data integration.</li> <li>8. New: SIYI gimbal SDK supports acquiring max zoom and current zoom multiples.</li> <li>9. New: Up to four video streams through RTSP protocol simultaneously.</li> <li>10. Improve: Gimbal saves working mode before power off.</li> <li>11. Improve: Initial speed.</li> <li>12. Improve: Focus takes too long on start.</li> <li>13. Improve: Zoom firmware upgrade fails. Upgrading takes too long.</li> <li>14. Improve: Focus was in the image center when controlled by S.Bus.</li> </ol>

## 6.6 SIYI PC Assistant Update Log

<b>Date</b>	2024-01-06
<b>Version</b>	1.4.0
<b>Updates</b>	1. New: Support AI follow function and adjusting follow speed.

<b>Date</b>	2023-12-18
<b>Version</b>	1.3.9
<b>Updates</b>	1. New (ZT30, ZT6): An activation process for thermal imaging function.

<b>Date</b>	2023-11-02
<b>Version</b>	1.3.8 svn6958
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. New: Compatibility to ZT6 Mini Dual-Sensor Optical Pod.</li> <li>2. New: A switch to enable zoom camera and thermal camera recording simultaneously (only in non-split-image mode and main / sub stream should be zoom / thermal camera).</li> <li>3. Fix: ZT30 does not record video after setting recording resolution.</li> <li>4. Fix: ZT30 does not set main stream resolution.</li> </ol>

<b>Date</b>	2023-08-24
<b>Version</b>	v1.3.7 svn6958
<b>Updates</b>	<ol style="list-style-type: none"> <li>1. New: Compatibility to a new model.</li> <li>2. New: Support ZT30 to switch between H265 and H264 codec.</li> <li>3. Improve: Gimbal calibration function has its own page now.</li> <li>4. New: Gimbal configuration (thermal synchronize zoom, thermal color palette)</li> </ol>

## 7 After-sale Service

If there were any questions or problems using SIYI Technology's product, you can always try to send an email to SIYI Official A/S Center ([support@siyi.biz](mailto:support@siyi.biz)) or consult your sales representative or dealer for answers or solutions.

### 7.1 Repair Service

If your purchased SIYI products cannot work properly, please contact SIYI Official A/S Center for consulting.

Usually there are two situations for acquiring repair service.

- Product Defect
- Product Damage

SIYI products under the two situations can be sent back to SIYI for repairing. Defect products with valid warranty can be repaired for free. Defect products without valid warranty or damaged products should be charged of repair fees after repairing.

Please refer to SIYI's Official A/S Quotation for detail.

## 7.2 Warranty

SIYI Technology guarantees that, subject to the following conditions, Return & Refund Service, Replacement Service, and Warranty Repair Service can be requested. Please contact SIYI directly ([support@siyi.biz](mailto:support@siyi.biz) or your sales manager) or authorized SIYI dealer for more detail.

### 7.2.1 7-Day Return & Refund

You can request Return & Refund Service:

Within seven (7) days of receiving a product if the product has no manufacturing defect, has not been activated and is still in new or like-new condition.

Within seven (7) days of receiving a product if the product has a manufacturing defect.

Return & Refund Service will not be provided where:

It is requested beyond seven (7) calendar days of receiving a product.

A product sent to SIYI for Return & Refund Service does not include all original accessories, attachments or packaging, or any item is not in new or like-new condition, i.e., with cracks, dents, or scratches.

A legal proof of purchase, receipt or invoice is not provided or is reasonably believed to have been forged or tampered with.

Any fault or damage of the product is caused by unauthorized use or modification of the product, including exposure to moisture, entry of foreign bodies (water, oil, sand, etc.) or improper installation or operation.

Product labels, serial numbers, waterproof marks, etc. show signs of tampering or alteration.

Damage is caused to the product by uncontrollable external factors, including fire, floods, high winds, or lightning strikes.

A product is not delivered to SIYI within seven (7) calendar days after Return & Refund Service confirmation is sent from SIYI.

Other circumstances stated in this policy.

### **7.2.2 15-Day Replacement**

You can request Replacement Service:

Within fifteen (15) calendar days of receiving the product if the product has sustained a substantial damage in transit, provided always that the damage proof issued by the carrier can be provided to SIYI.



Within fifteen (15) calendar days of receiving the product if the product does not match the original description of the product in one or more significant respects.

Within fifteen (15) calendar days of receiving the product if the product suffers performance failure.

Replacement Service will not be provided where:

Service is requested more than fifteen (15) calendars days after receiving a product.

Legal proof-of-purchase, receipts, or invoices are not provided, or are reasonably believed to have been forged or tampered with.

A product sent to SIYI for replacement does not include all original accessories, attachments, and packaging, or contains items damaged by user error.

A product is found to have no defects after all appropriate tests are conducted by SIYI.

Any fault or damage of the product is caused by unauthorized use or modification of the product, including exposure to moisture, entry of foreign bodies (water, oil, sand, etc.) or improper installation or operation.

Damage is caused by uncontrollable external factors, including fires, floods, high winds, or lightning strikes.

Received product has not been sent back to SIYI seven (7) calendar days after replacement confirmation from SIYI.

Proof of damage during transit issued by the carrier cannot be provided.

Other circumstances stated in this policy.

### **7.2.3 1-Year Warranty Repair**

You can request warranty repair service:

If a product does not function as warranted during the warranty period, you may obtain after-sales service by contacting SIYI's service center. You will need to provide a valid proof-of-purchase, receipt, or order number for the warranty service.

Charges may apply for services not covered by this Limited Warranty. Please contact SIYI for information specific to your location.

Please note that the warranty service is only available in the respective SIYI service regions where you purchased your SIYI product.

Warranty Repair service will not be provided where:

Crashes or fire damage caused by non-manufacturing factors, including but not limited to pilot errors.

Damage caused by unauthorized modification, disassembly, or shell opening not in accordance with official instructions or manuals.

Damage caused by improper installation, in correct use, or operation not in accordance with official instructions or manuals.

Damage caused by non-authorized service provider.

Damage caused by unauthorized modification of circuits and mismatch or misuse of the battery and charger.

Damage caused by operation in bad weather (i.e., strong winds, rain, sand/dust storms, etc.)

Damage caused by operating the product in an environment with electromagnetic interference (i.e., in mining areas or close to radio transmission towers, high-voltage wires, substations, etc.)

Damage caused by operating the product in an environment suffering from interference from other wireless devices (i.e., transmitter, video-downlink, Wi-Fi signals, etc.)

Damage caused by reliability or compatibility issues when using unauthorized third-party parts.

Damage caused by operating the unit with a low-charged or defective battery.

Products or parts with an altered identification label or from which the identification label has been removed.

**SIYI Technology**

Business Inquiry: [info@siyi.biz](mailto:info@siyi.biz)

Phone: +86 400 838 2918

A/S Center: [support@siyi.biz](mailto:support@siyi.biz)